

# CASE SPECIFICATIONS:

## REFRIGERATION

LOAD: 12,000 BTU/hr

COIL TEMP: 22° F

LIQUID STUB: 3/8IN ODS

SUCTION STUB: 5/8IN ODS



ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 3.2A

LIGHT BALLAST: 2.0A

TOTAL: 5.2A

MCA: 15.0A

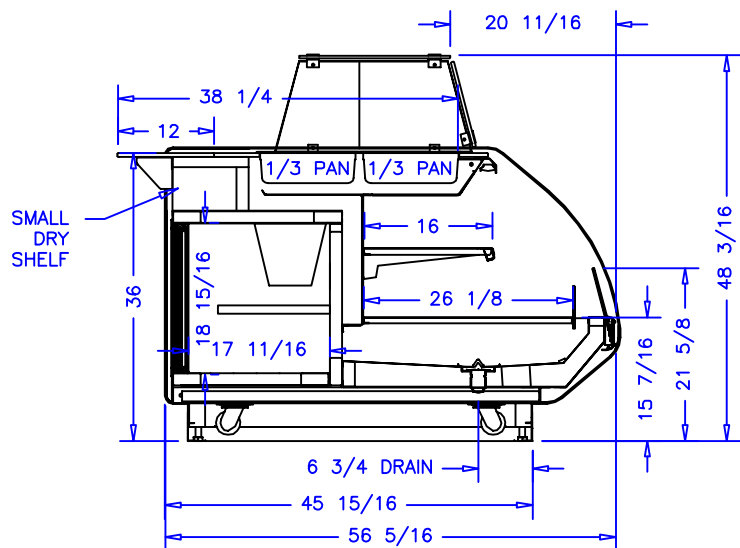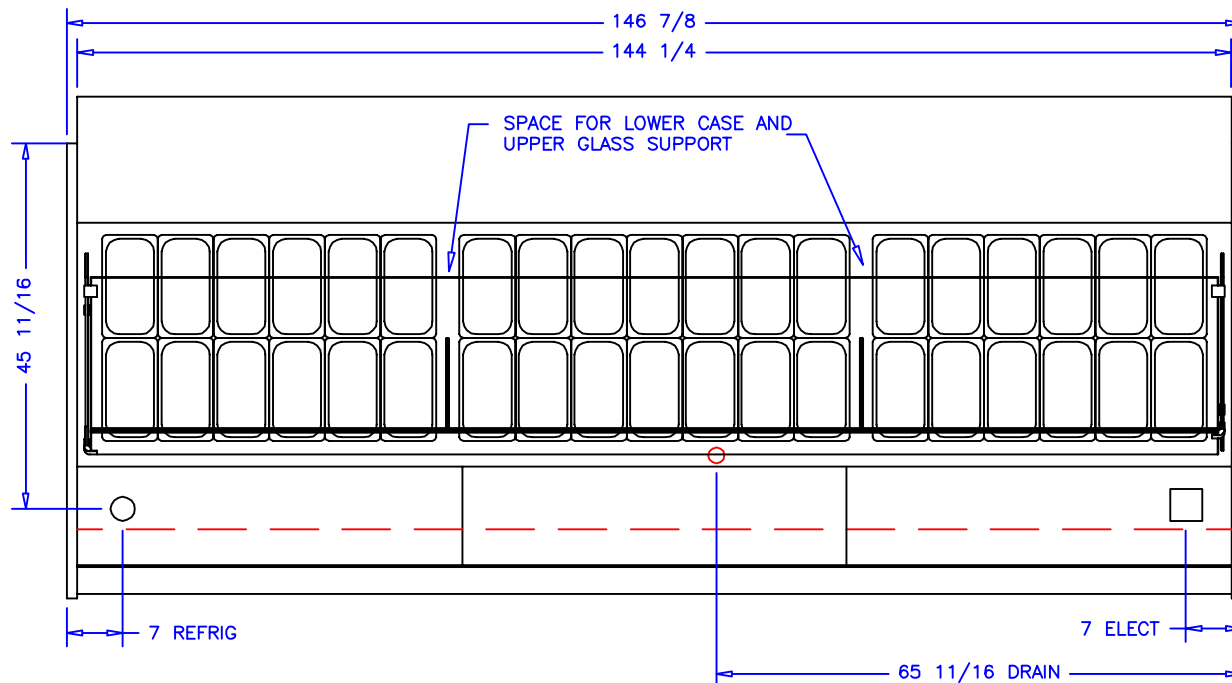


PANS: (38) 1/3 SIZE W/LIDS INCLUDED STANDARD

## NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



|                        |  |                           |      |   |                         |
|------------------------|--|---------------------------|------|---|-------------------------|
| AUTHORIZATION (PRINT): |  | DATE:                     |      |  <b>börger systems</b> |                         |
| SIGNATURE:             |  |                           |      |   |                         |
|                        |  |                           |      | SCALE: 1:24   | DRAWN BY: D HUNT        |
|                        |  |                           |      | DATE: 7-5-12  | CHECKED BY:             |
|                        |  | 5-3-13 SEH<br>7-10-12 DRH |      | 12' FOOD PREP LOW   |                         |
|                        |  | DATE                      | REV. | DWG.  | INCH                    |
|                        |  | REVISION                  | TOL: |   |                         |
|                        |  |                           |      |   | DRAWING NUMBER<br>P6254 |