

CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 8,000 BTU/hr

COIL TEMP: 22° F

LIQUID STUB: 3/8IN ODS

SUCTION STUB: 5/8IN ODS


ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 2.4A


LIGHT BALLAST: 1.2A

TOTAL: 3.6A

MCA: 15.0A

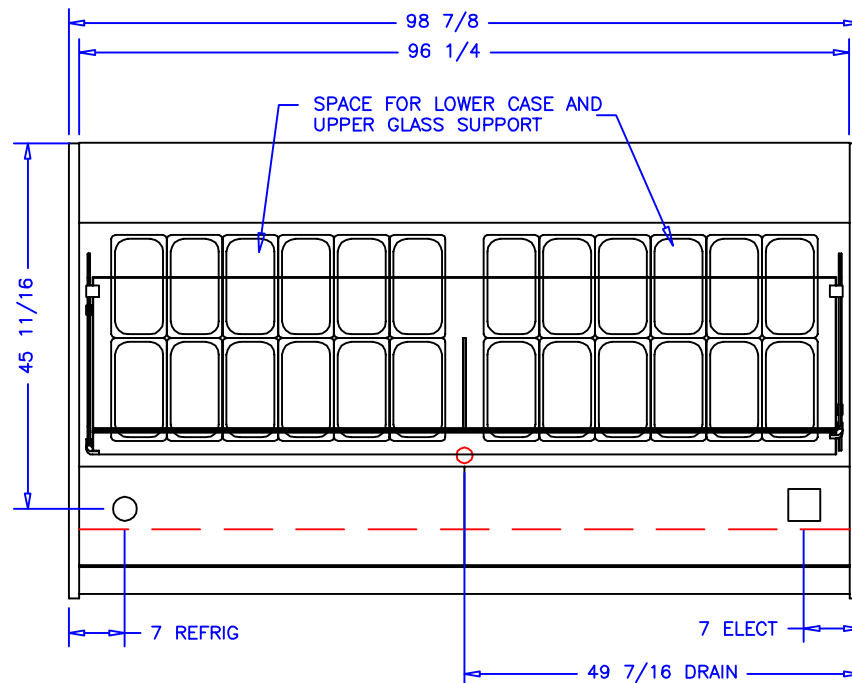


PANS: (24) 1/3 SIZE W/LIDS INCLUDED STANDARD

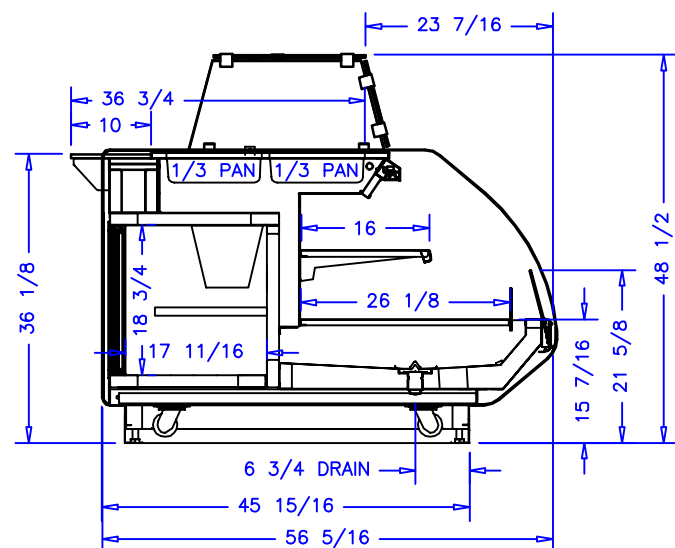

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:24	DRAWN BY: D HUNT
				DATE: 4-29-13	CHECKED BY:
				MODEL: DL100	
				8' FOOD PREP LOW	
		3-31-14 DRH			
DATE	REV.	DWG.	INCH		
REVISION	TOL:			DRAWING NUMBER	
				P6430	