

CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 3,600 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

30° F @ 250 FPM

INITIAL DEFROST SETTING

6 PER DAY @ 30 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.



ECM EVAP. FANS: 0.6A

LED LIGHTS: 2.4A

TOTAL: 3.0A

MCA: 15.0A


SEPERATE ISOLATED OUTLET AVAILABLE
FOR SCALE STAND.

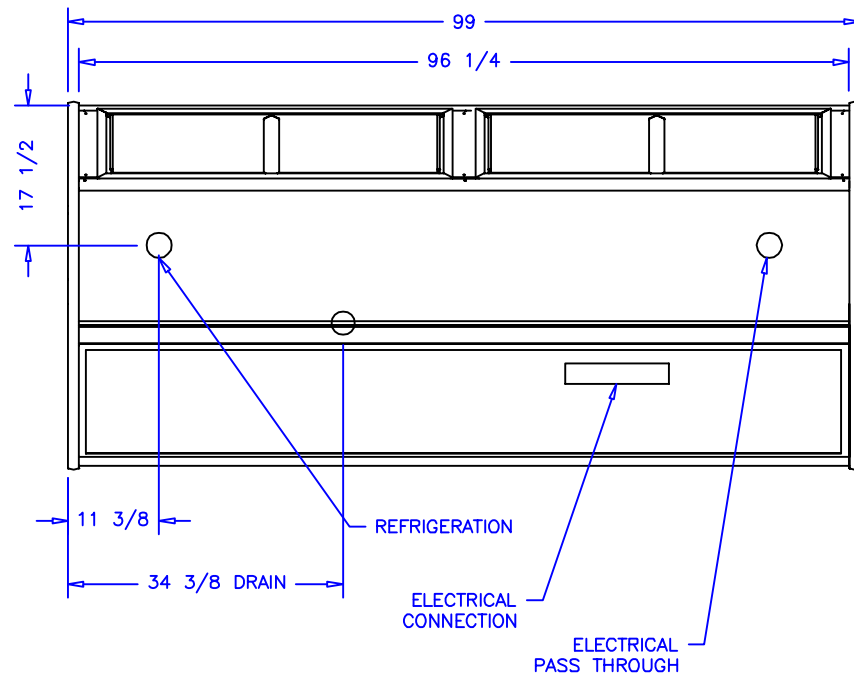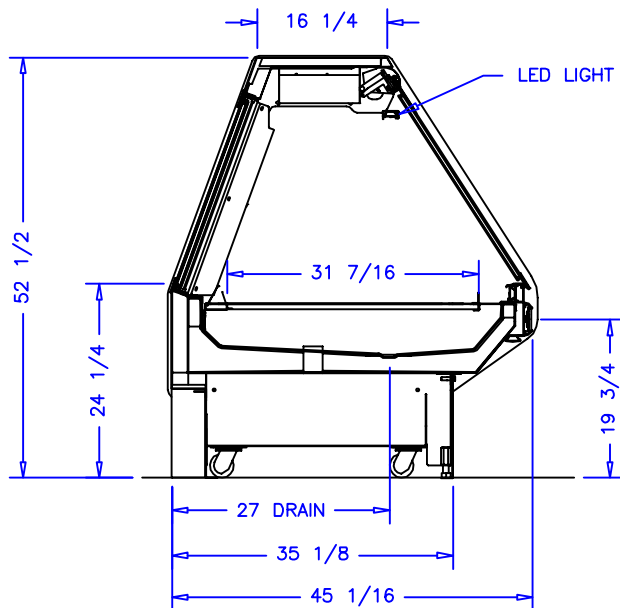

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
		5-27-14 DRH		8FT DELI FG	
		DATE: 1:24		DRAWN BY: D HUNT	
		DATE: 3-10-14		CHECKED BY:	
		REVISION		TOL:	
		DATE: 3-10-14		DRAWING NUMBER	
				P6611	