

CASE SPECIFICATIONS:

REFRIGERATION

FRONT LOAD: 3,400 BTU/hr

REAR LOAD: 600 BTU/hr

TOTAL LOAD: 4,000 BTU/hr

COIL TEMP: 22° F

LIQUID STUB: 3/8IN ODS

SUCTION STUB: 5/8IN ODS



ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 1.2A

LIGHT BALLAST: 1.2A

TOTAL: 2.4A

MCA: 15.0A

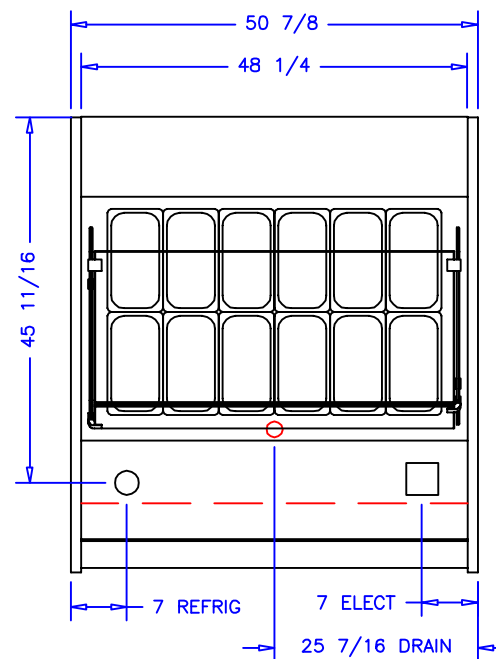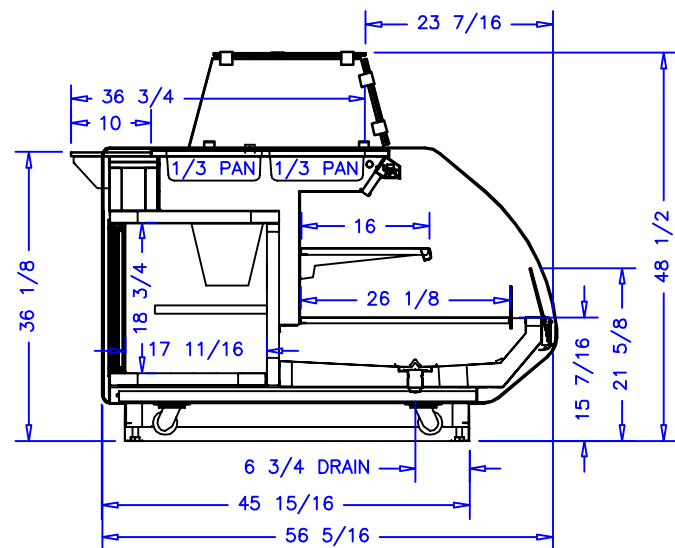


PANS: (12) 1/3 SIZE W/LIDS INCLUDED STANDARD

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems				
SIGNATURE:		SCALE: 1:24 DATE: 8-7-13				MODEL: DLI100	DRAWN BY: D HUNT	
						4' FOOD PREP LOW		CHECKED BY:
						DATE	REV.	DWG.
REVISION		TOL:		P6698				