

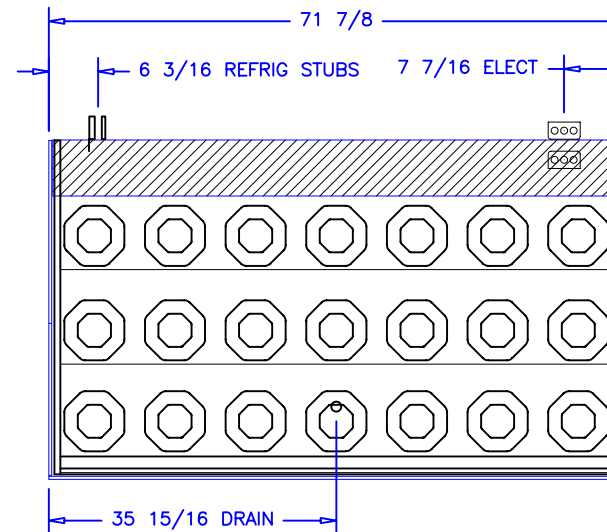


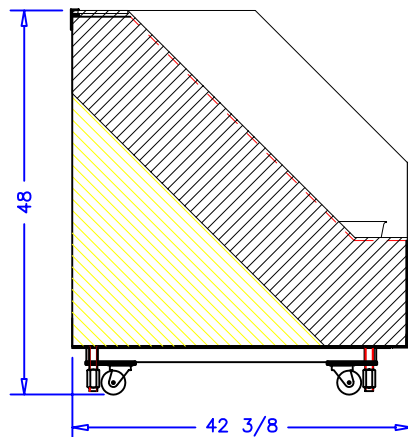

CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 7,550 BTU/hr
SUCTION TEMP: 22° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .26A
TOTAL: .26A
MCA: 15.0A

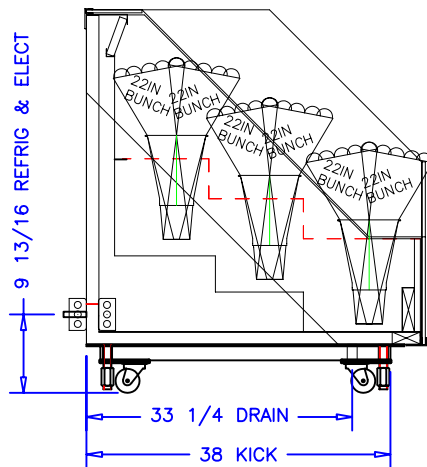

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			 börger systems		DRAWN BY: D HUNT
SIGNATURE:						SCALE: 1:24
				DATE: 7-14-03		
		7-17-08 DRH 6-8-07 DRH		6FT HP LPM		
		DATE	REV.	DIM:	INCH	DRAWING NUMBER
		REVISION	TOL:			P3006A