
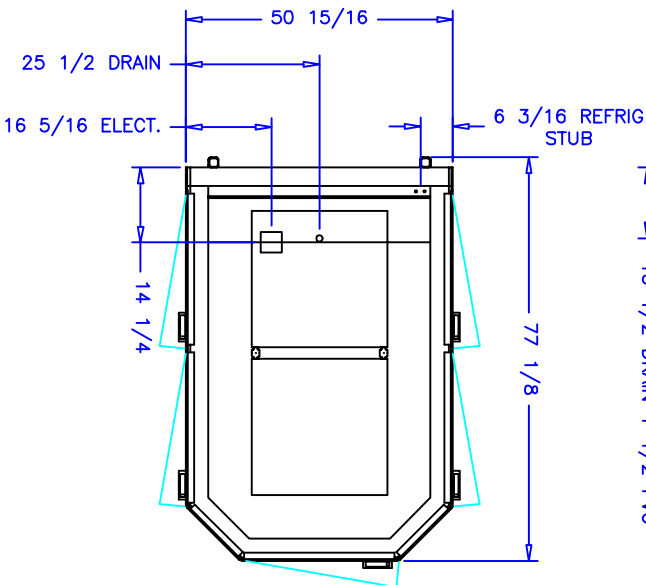
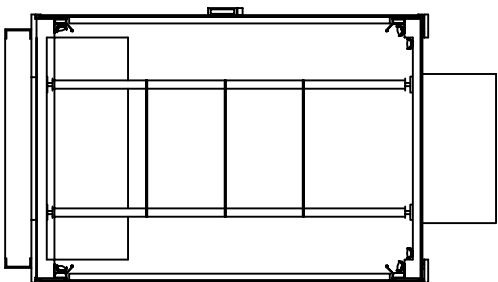


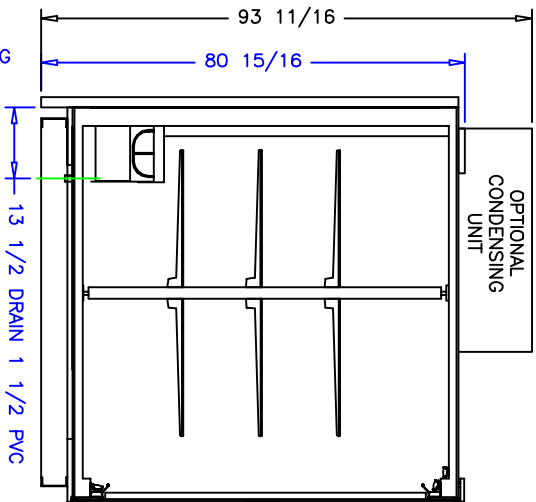

CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 6,900 BTU/hr
SUCTION TEMP: 25° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .30A
LIGHTS: 3.6A
CONDENSATE PUMP: 1.0A
EVAP. PAN: 3.0A
TOTAL: 7.9A
MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
1HP COND. UNIT: 10.9A
TOTAL: 7.7A
MCA: 10.8A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



371X
COMMERCIAL REFRIGERATION
LESS CONDENSING UNIT

 börger systems			
SCALE: 1:24	DRAWN BY: D HUNT		
DATE: 9-14-99	CHECKED BY:		
4-13-16 DRH	SDR 2BAY ECP		
8-24-04 DRH			
DATE	REV	DATE	INCH
REVISION	TOL	DRAWING NUMBER	
			P3152