
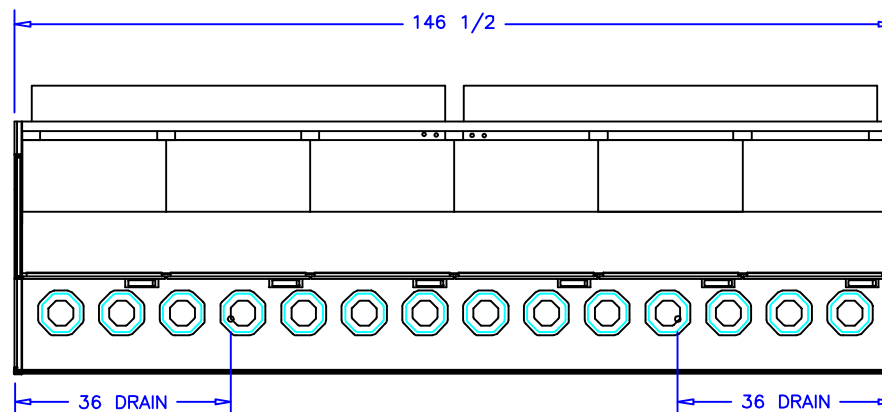
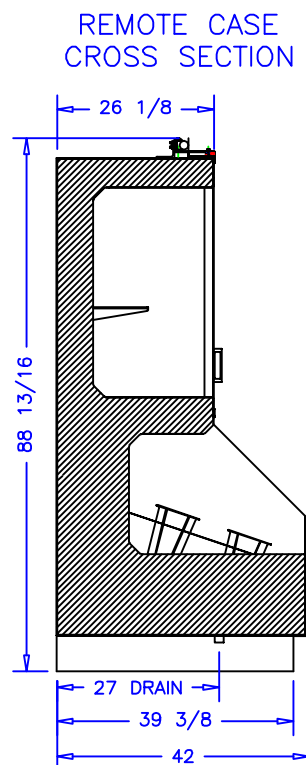


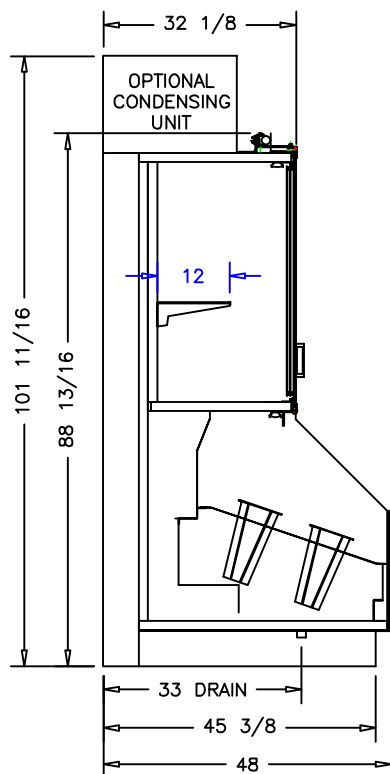

CASE SPECIFICATIONS:

REFRIGERATION:

LEFT SECTION LOAD: 8,500 BTU/hr

LEFT SECTION LOAD: 8,500 BTU/hr

TOTAL LOAD: 17,000 BTU/hr

COIL TEMP: 25°F

SUCTION STUB: 5/8IN ODS

LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH

EVAP. FANS: 3.32A

LIGHTS: 2.4A

COND. PUMP: 1.0A

TOTAL: 6.72A

MCA: 15.0A

ELECTRICAL 208/230V, 60HZ, 1PH

EVAP. PAN: 7.2A

(2) 1 1/4HP COND. UNIT: 18.4A

TOTAL: 25.6A

MCA: 31.6A



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):

DATE:

SIGNATURE:

DATE:

REV:

DATE:

REV:

DATE:

REV:

DATE:

REV:

DATE:

REV:



börgen systems

6DR, 12FT HUTCH

DRAWN BY: D HUNT

CHECKED BY:

DRAWING NUMBER

P3754