
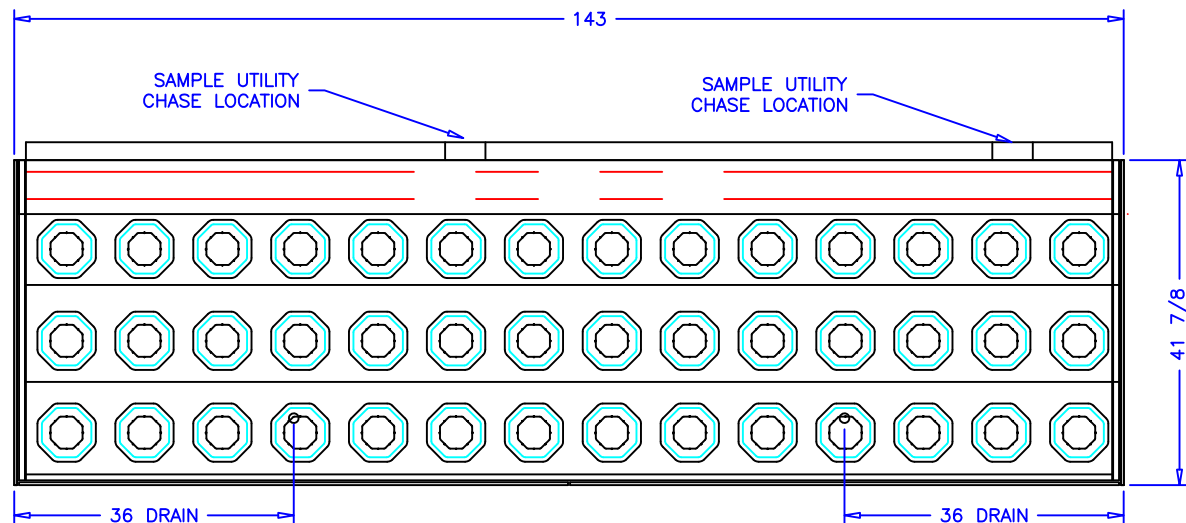
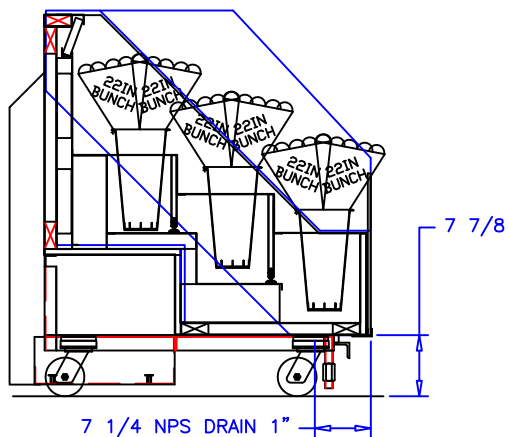


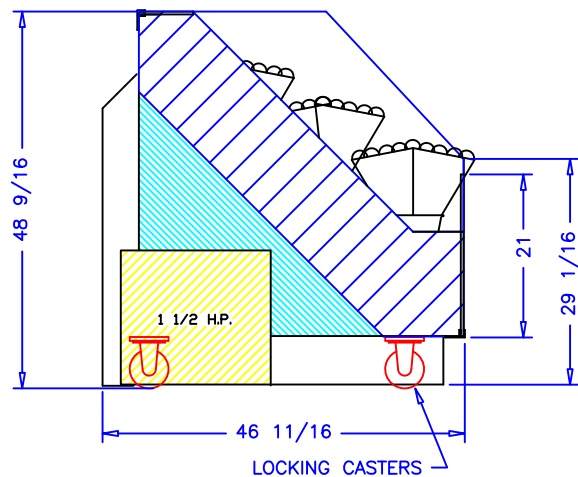

CASE SPECIFICATIONS:

REFRIGERATION:
LOAD: 13,200 BTU/hr
SUCTION TEMP: 25°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: .90A
TOTAL: .90A
MCA: 15.0A

CU ELECTRICAL 230V, 60HZ, 1PH
EVAP. PAN: 7.2A
1 1/2HP COND. UNIT: 12.9A
TOTAL: 20.1A
MCA: 24.8A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELECTRICAL CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

			börger systems	
		SCALE: 1:16		DRAWN BY: D HUNT
		DATE: 4-3-02		CHECKED BY: NAME
10-28-02	DRH	12' HP LPM (OCU)		
4-15-02	A.B.			
DATE	REV.	DIM: INCH	DRAWING NUMBER P3952	
REVISION		TOL: ±1/32		