


CONDENSING UNIT ON THIS END NEEDS SPACE FOR AIR INTAKE

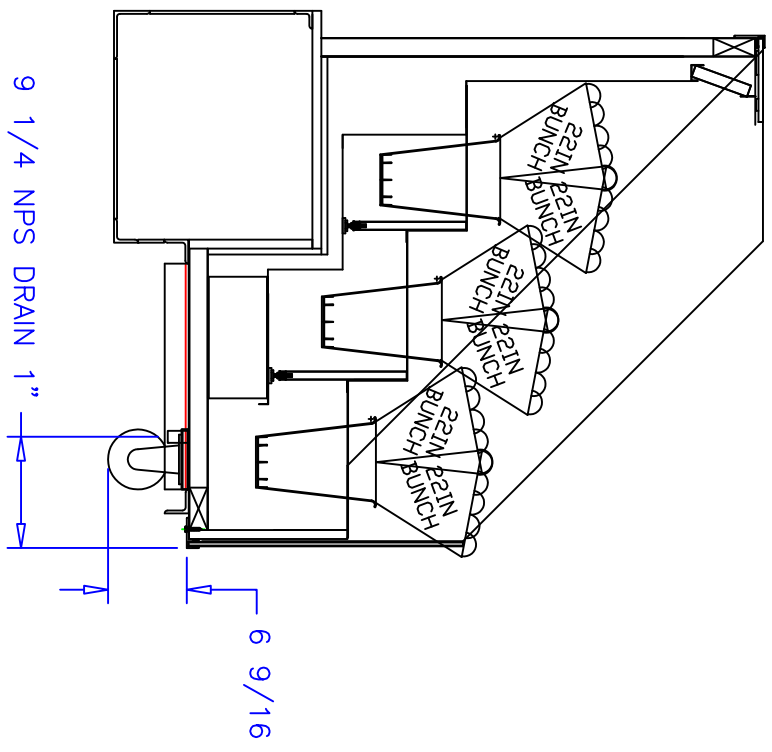

**CASE SPECIFICATIONS:**

**REFRIGERATION:**

- LOAD: 12,600 BTU/hr
- SUCTION TEMP: 20°F
- SUCTION LINE: 5/8IN ODS
- LIQUID LINE: 3/8IN ODS
- ELECTRICAL 115V, 60HZ, 1PH
- EVAP. FANS: 0.26A
- TOTAL: 0.26A
- CU ELECTRICAL 230V, 60HZ, 1PH
- 1 1/2HP COND. UNIT: 15.9A
- EVAP. PAN: 6.5A
- TOTAL: 22.4A

**NOTES:**

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELECTRICAL CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



**börger systems**

SCALE: 1:16		DRAWN BY: D HUNT	
DATE: 5-1-02		CHECKED BY: NAME	
10' HP LPM (OCU)			
DATE	REV.	DM:	INCH
REVISION		TOL:	±1/32
			DRAWING NUMBER
			P39666B