
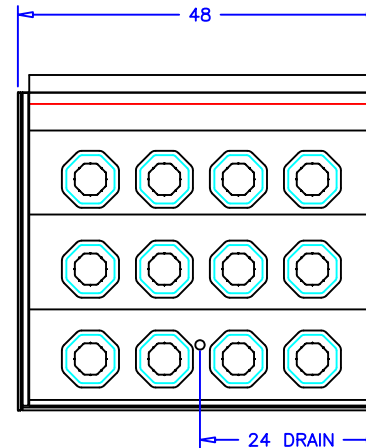


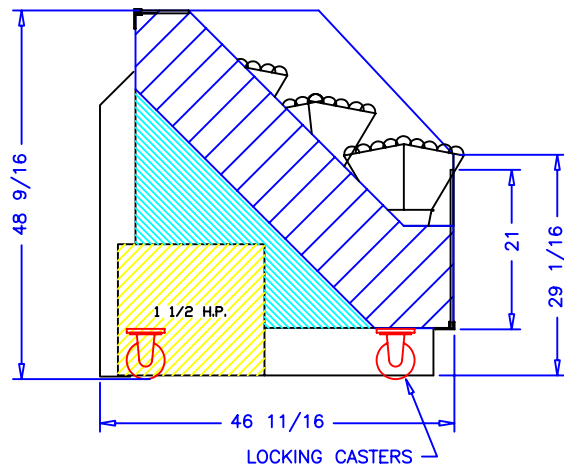


CASE SPECIFICATIONS:

REFRIGERATION:
 LOAD: 3,960 BTU/hr
 SUCTION TEMP: 20°F
 SUCTION LINE: 5/8" IN ODS
 LIQUID LINE: 3/8" IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 EVAP. FANS: 0.13A
 LIGHTS: .94A
 TOTAL: 1.07A
 MCA: 15.0A

CU ELECTRICAL 230V, 60HZ, 1PH
 EVAP. PAN: 7.2A
 1/2HP COND. UNIT: 4.0A
 TOTAL: 11.2A
 MCA: 12.8A

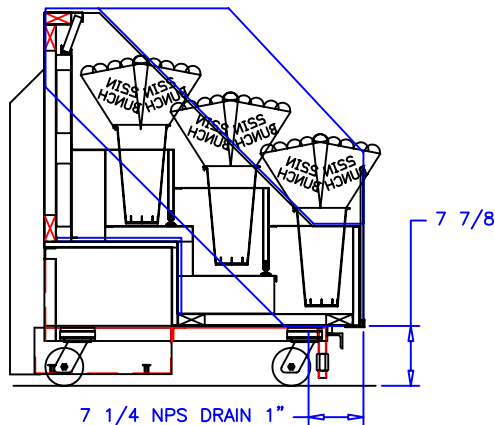

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELECTRICAL CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

			börger systems	
		SCALE: 1:16		DRAWN BY: D HUNT
		DATE: 2-4-03		CHECKED BY: NAME
		4' HP LPM (OCU)		
DATE	REV.	DIM: INCH		DRAWING NUMBER
REVISION		TOL: ±1/32		P4092B