

LEFT CASE SPECIFICATIONS:




REFRIGERATION

LOAD: 17,900 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .39A
 FRESH WATER EXCHANGE: 5.5A
 TOTAL: 5.89A


WATER SUPPLY TO CASE:
 4-5 GPM @ 45-60 PSIG

FLOOR DRAIN MUST BE PROVIDED.

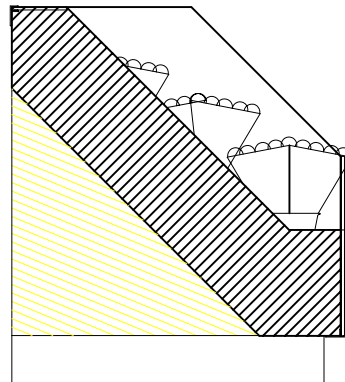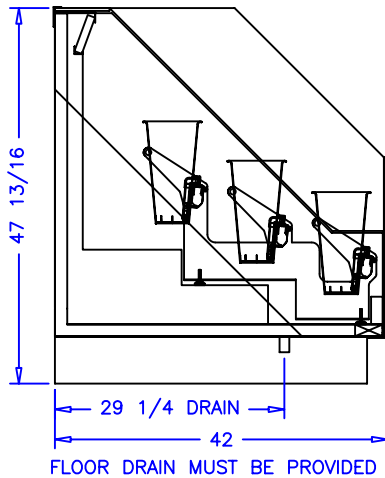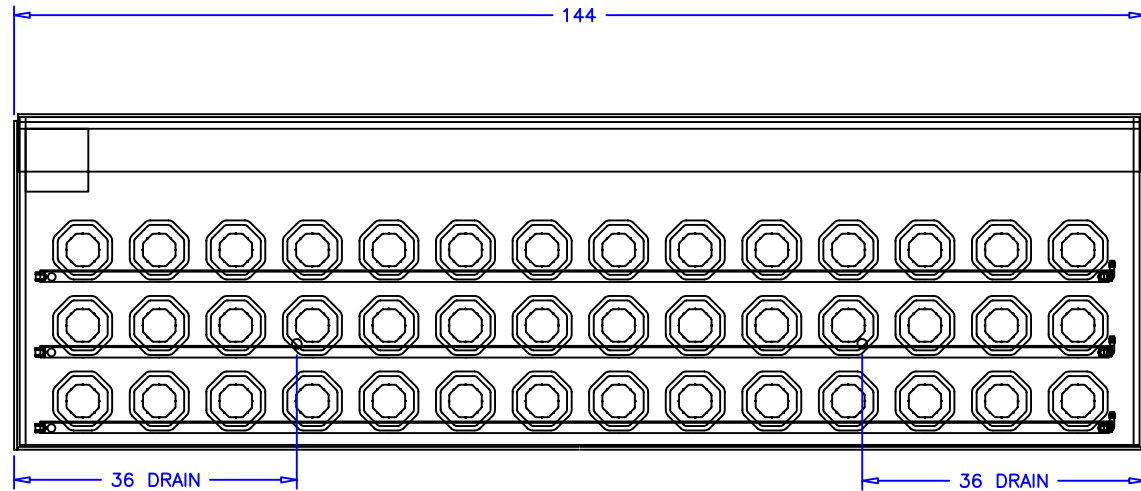

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

			börger systems		
			SCALE: 1:16		DRAWN BY: D HUNT
			DATE: 12-10-03		CHECKED BY:
			12FT LPM FWE		
DATE	REV.	DIM: INCH		DRAWING NUMBER	
REVISION	TOL:			P4308B	