

CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 7,560 BTU/hr
 COIL TEMP: 25° F
 LIQUID STUB: 3/8IN ODS
 SUCTION STUB: 5/8IN ODS




ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .13A
 FRESH WATER EXCHANGE: 5.5A
 TOTAL: 5.63A
 MCA: 15.0A

WATER SUPPLY TO CASE:
 4-5 GPM @ 45-60 PSIG

FLOOR DRAIN MUST BE PROVIDED.

AIR DISCHARGE:
 35° F @ 250 FPM

INITIAL DEFROST SETTING
 6 PER DAY @ 30 MIN. EACH

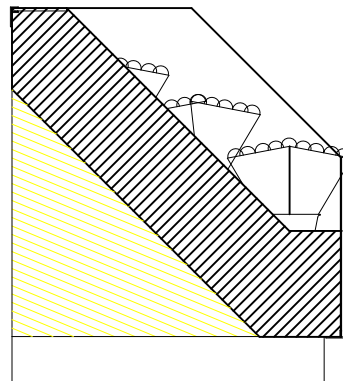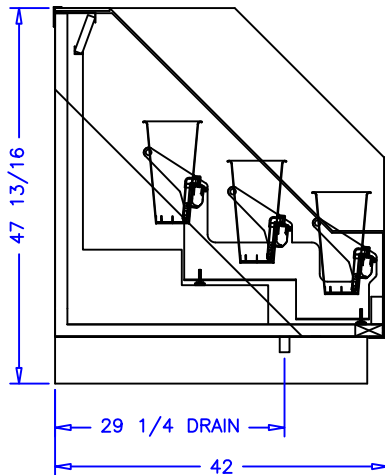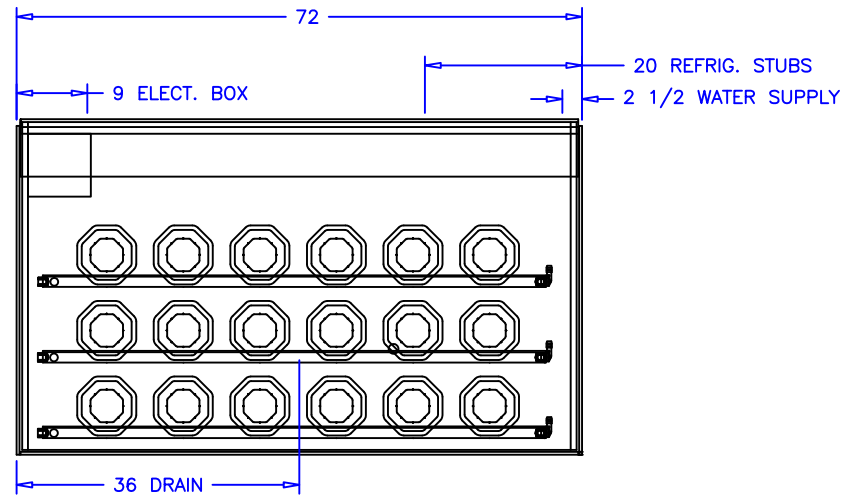


FLOOR DRAIN MUST BE PROVIDED

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



		 börger systems	
		SCALE: 1:16	DRAWN BY: D HUNT
		DATE: 2-9-04	CHECKED BY:
10-19-09 DRH	7-28-09 DRH	6FT LPM FWE	
DATE	REV.	DIM: INCH	DRAWING NUMBER
REVISION	TOL:		P4361