




DOORED CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 2,875 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .13A
 LIGHT BALLAST: .74A
 CONDENSATE PAN: 3.0A
 TOTAL: 3.87A

ELECTRICAL 230VAC, 60HZ, 1PH.
 1/2HP COND. UNIT: 7.0A
 TOTAL: 7.0A

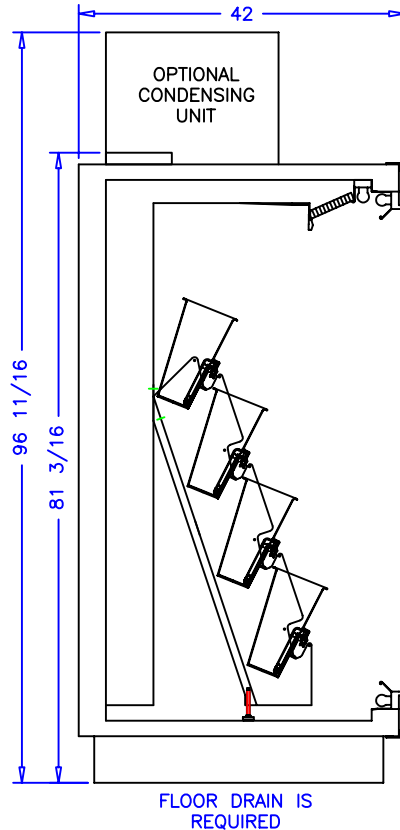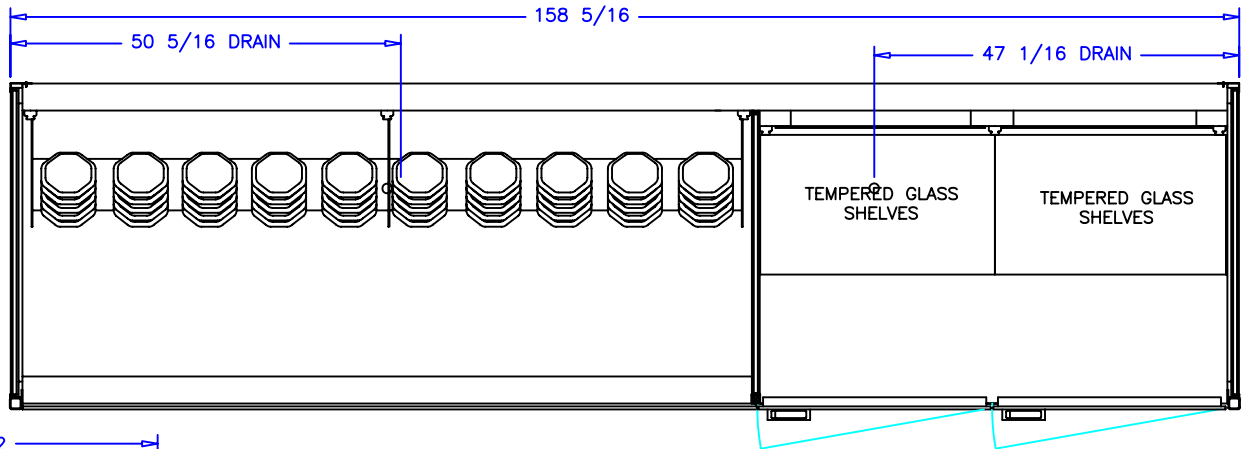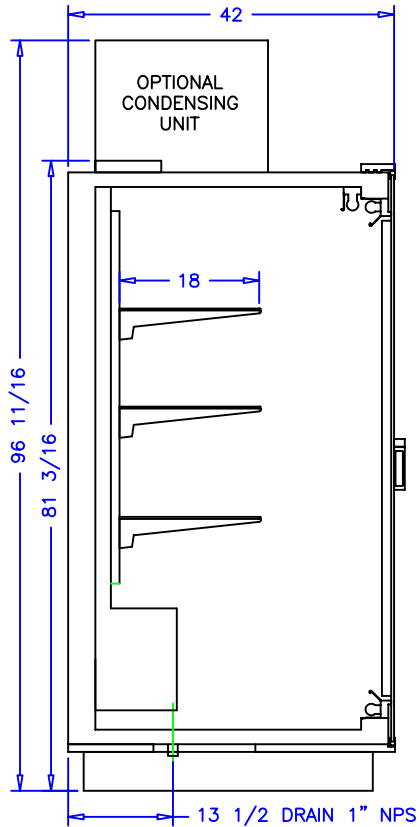

OPEN CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 10,800 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .39A
 LIGHT BALLAST: 1.48A
 FRESH WATER SYSTEM: 5.5A
 TOTAL: 7.37A

ELECTRICAL 230VAC, 60HZ, 1PH.
 1 1/2HP COND. UNIT: 10.9A
 TOTAL: 10.9A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

				börger systems	
DATE	REV.	DM:	INCH	DRAWN BY:	D. HUNT
REVISION		TOL:	±1/32	CHECKED BY:	NAME
2DR 8FT DF LFT FWE CMB					
					DRAWING NUMBER
					P4553B