

DOORED CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 2,875 BTU/hr
SUCTION TEMP: 25°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.3A
LIGHT BALLASTS: .94A
TOTAL: 1.24A




OPEN CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 8,200 BTU/hr
COIL TEMP: 25° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 0.9A
LIGHT BALLAST: .94A
FRESH WATER EXCHANGE: 5.5A
TOTAL: 7.34A
MCA: 15.0A

WATER SUPPLY TO CASE:
4-5 GPM @ 45-60 PSIG

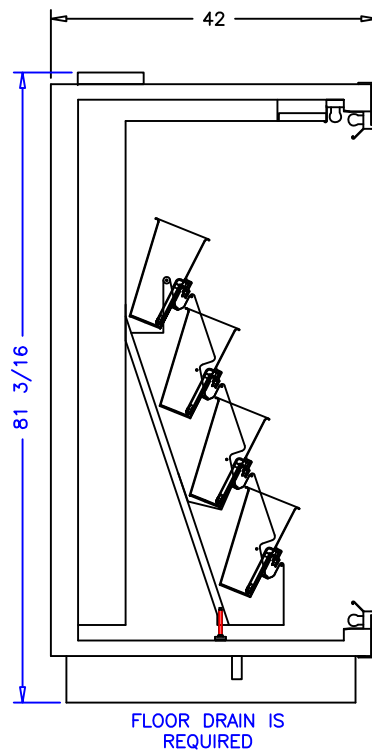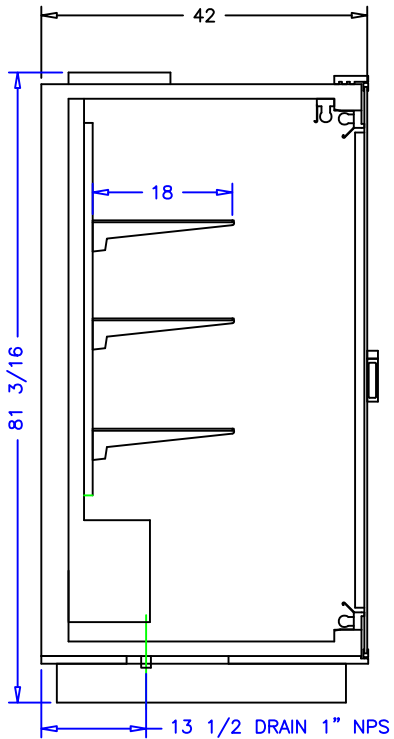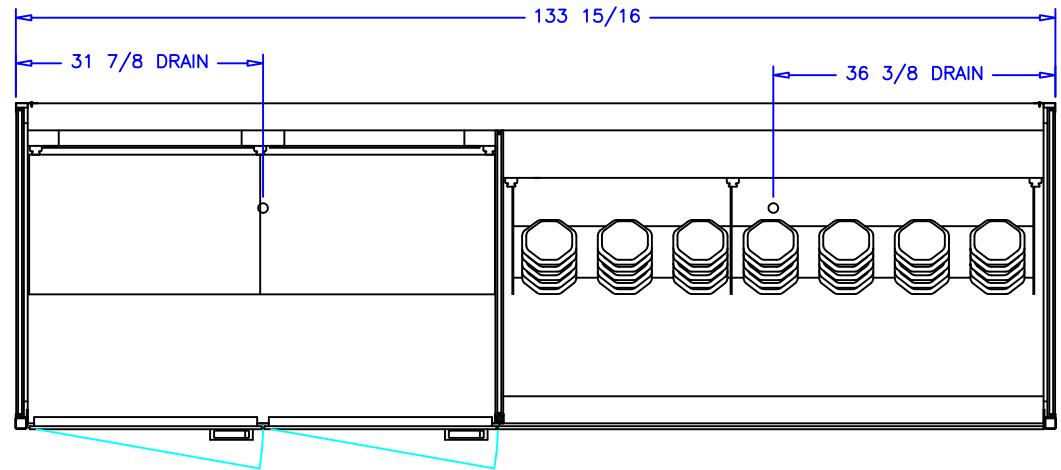

DOORED ALTERNATE REFRIGERATION
LIQUID CO2
LOAD: 2,875 BTU/hr
CO2 TEMP: 20°F
GPM: .11
PRES. DROP: 0.9
STUB: 1/2IN ODS

OPEN ALTERNATE REFRIGERATION
LIQUID CO2
LOAD: 8,200 BTU/hr
CO2 TEMP: 20°F
GPM: .33
PRES. DROP: 5.8
STUB: 1/2IN ODS

FLOOR DRAIN MUST BE PROVIDED

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



börgen systems

		SCALE: 1:16		DRAWN BY: D. HUNT	
		DATE: 8-12-03		CHECKED BY: NAME	
8-13-03		DRH		2DR 6FT OPEN FWE COMBO	
DATE	REV.	DIM:	INCH	DRAWING NUMBER	
REVISION		TOL:	±1/32	P4701	