
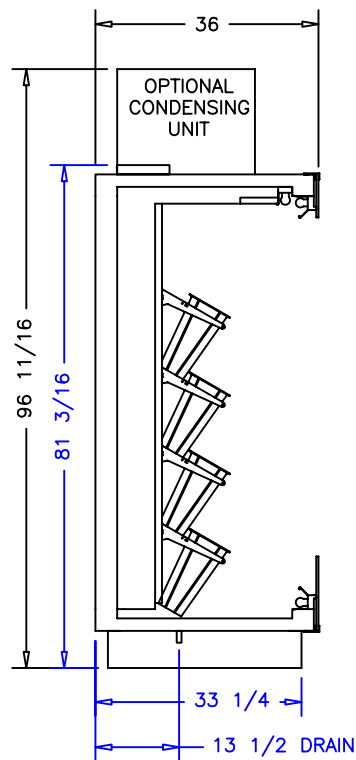
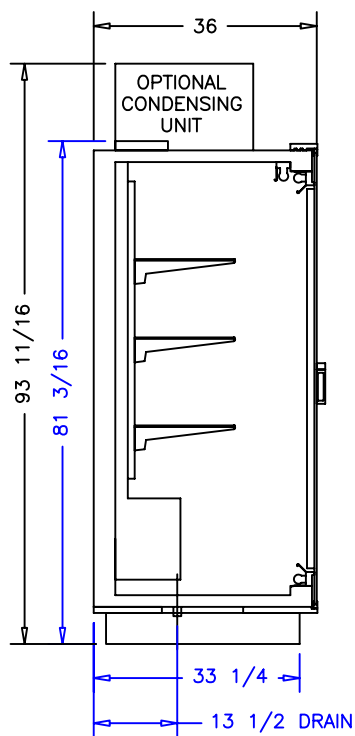


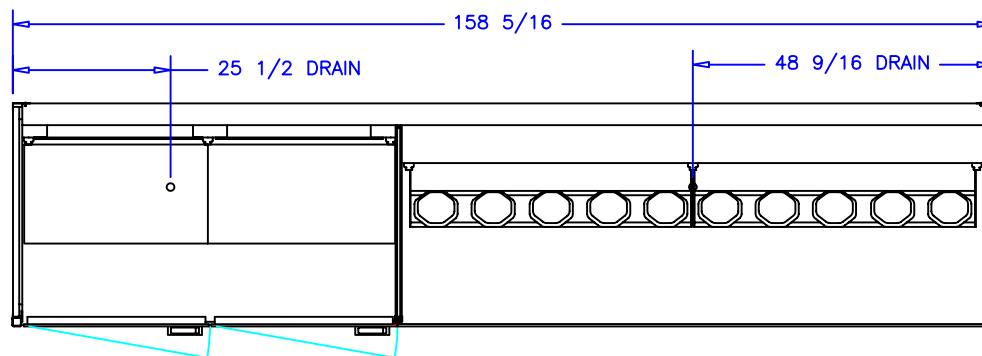

DOORED CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 3,450 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .13A
LIGHT BALLAST: .94A
CONDENSATE PUMP: 1.0A
EVAP. PAN: 3.0A
TOTAL: 5.07A
MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
1/2HP COND. UNIT: 4.0A
TOTAL: 4.0A
MCA: 5.6A

OPEN CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 10,800 BTU/hr
SUCTION TEMP: 20°
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .52A
LIGHT BALLAST: 1.48A
CONDENSATE PUMP: 1.0A
TOTAL: 3.0A
MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
EVAP. PAN: 7.2A
1 1/2HP COND. UNIT: 10.9A
TOTAL: 18.1A
MCA: 23.7A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:24	DRAWN BY: D HUNT
				DATE: 12-7-05	CHECKED BY:
		2DR / 8FT DF			
DATE	REV.	DIM:	INCH	DRAWING NUMBER	
REVISION	TOL:			P4764A	