

OPEN CASE SPECIFICATIONS:



REFRIGERATION  
 LOAD PER FOOT: 1183 BTU/hr  
 LOAD: 7,100 BTU/hr  
 SUCTION TEMP: 20° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.  
 EVAP. FANS: .26A  
 LIGHT BALLAST: .74A  
 TOTAL: 1.0A  
 MCA: 15.0A

DOORED CASE SPECIFICATIONS:


REFRIGERATION  
 LOAD: 6,900 BTU/hr  
 SUCTION TEMP: 20° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.  
 EVAP. FANS: .26A  
 LIGHT BALLAST: 1.88A  
 TOTAL: 2.14A  
 MCA: 15.0A

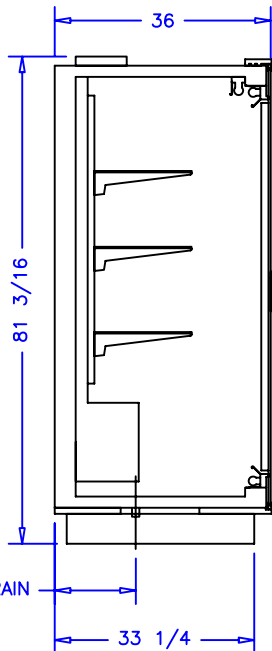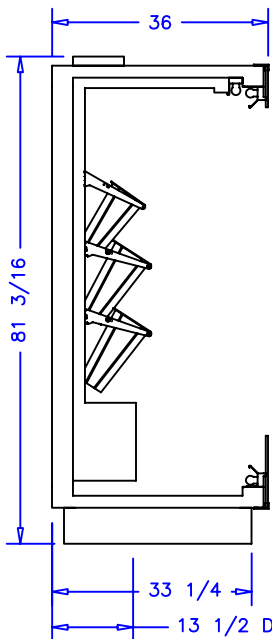

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 <b>börger systems</b>		DRAWN BY: D HUNT
SIGNATURE:				SCALE: 1:32
		DATE: 9-25-06	4DR 6FT OPN CMB	
DATE	REV.	DIM: INCH	DRAWING NUMBER	
REVISION	TOL:		P4932A	