
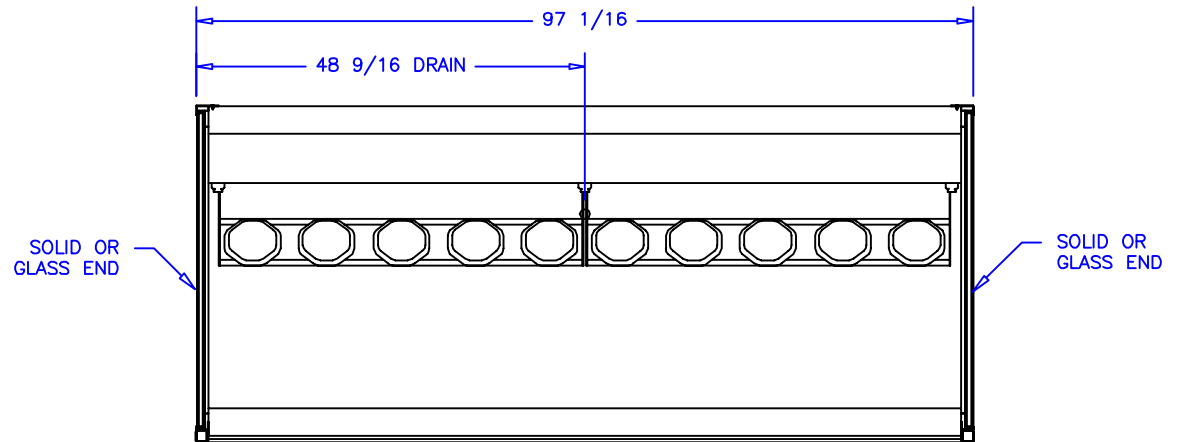


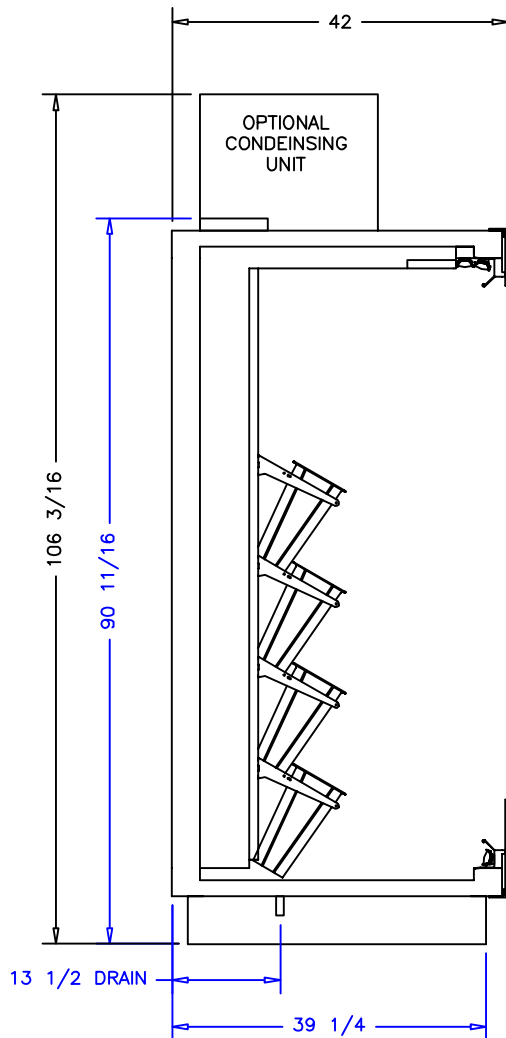

CASE SPECIFICATIONS:

REFRIGERATION
 LOAD: 11,200 BTU/hr
 COIL TEMP: 25°
 LIQUID STUB: 3/8IN ODS
 SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: 1.2A
 LIGHTS: 2.4A
 CONDENSATE PUMP: 1.0A
 TOTAL: 4.6A
 MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
 EVAP. PAN: 7.2A
 1 1/2HP COND. UNIT: 10.9A
 TOTAL: 18.1A
 MCA: 23.7A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:24	DRAWN BY: D HUNT
				DATE: 1-31-08	CHECKED BY:
		8FT DF TALL DP (2)GE			
DATE	REV.	DWG	INCH		
REVISION	TOL:			DRAWING NUMBER P5323	