
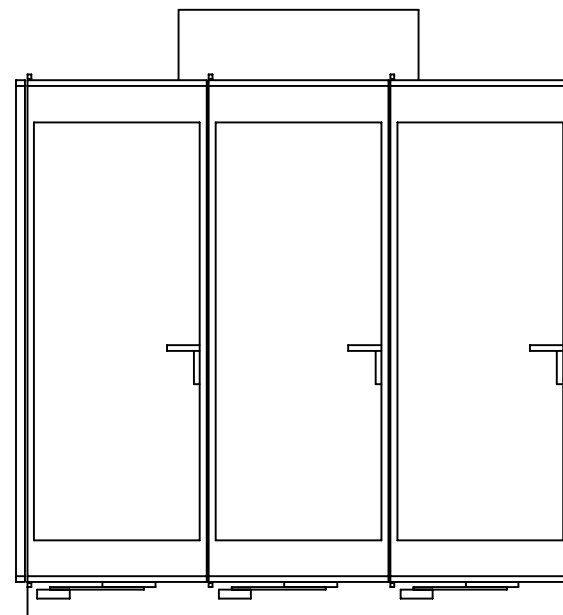
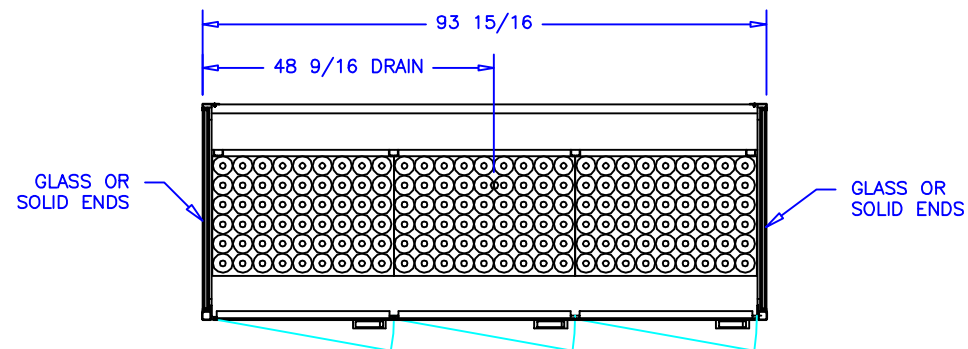


REFRIGERATION:
LOAD: 4,600 BTU/hr
COIL TEMP: 30°F
SUCTION STUB: 5/8IN ODS
LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.3A
LIGHTS: 6.0A
CONDENSATE PUMP: 1.0A
CONDENSATE PAN: 3.0A
TOTAL: 10.3A
MCA: 15.0A

OPTIONAL ELECTRICAL 115V, 60HZ, 1PH
1/2 HP COND. UNIT: 9.2A
TOTAL: 9.2A
MCA: 12.3A

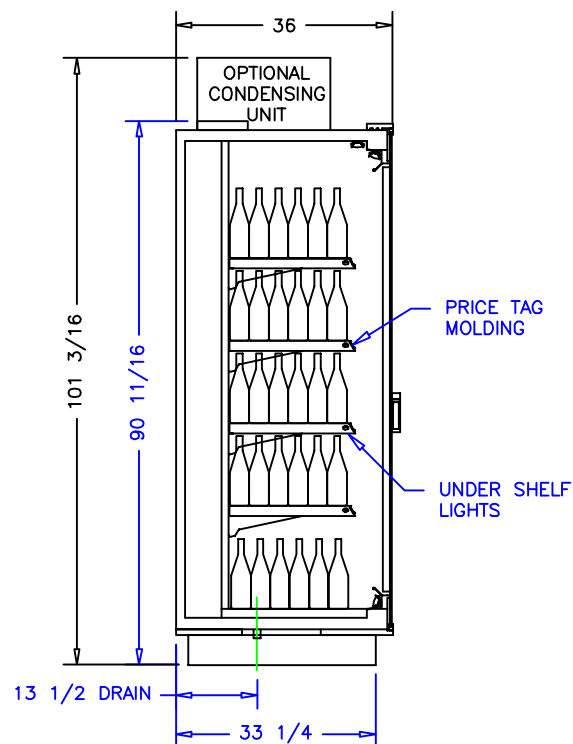

37X1
COMMERCIAL REFRIGERATOR
LESS CONDENSING UNIT

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			 börger systems			
		2-12-15	DRH	SCALE:	1:32		DRAWN BY: D HUN
		6-25-11	DRH	DATE:	8-18-09		CHECKED BY:
		4-28-10	DRH	3DR WINE TALL			
		4-22-10	DRH				
			DATE:	REV:	DWG:	INCH	DRAWING NUMBER P5690
	REVISION		TOL:				