




CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 8,050 BTU/hr
COIL TEMP: 30°F
SUCTION STUB: 5/8IN ODS
LIQUID STUB: 3/8IN ODS


ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.60A
LIGHTS: 7.2A
CONDENSATE PUMP: 1.0A
CONDENSATE PAN: 3.0A
TOTAL: 11.8A
MCA: 15.0A

OPTIONAL ELECTRICAL 208V, 60HZ, 1PH
1 HP COND. UNIT: 7.7A
TOTAL: 7.7A
MCA: 10.8A

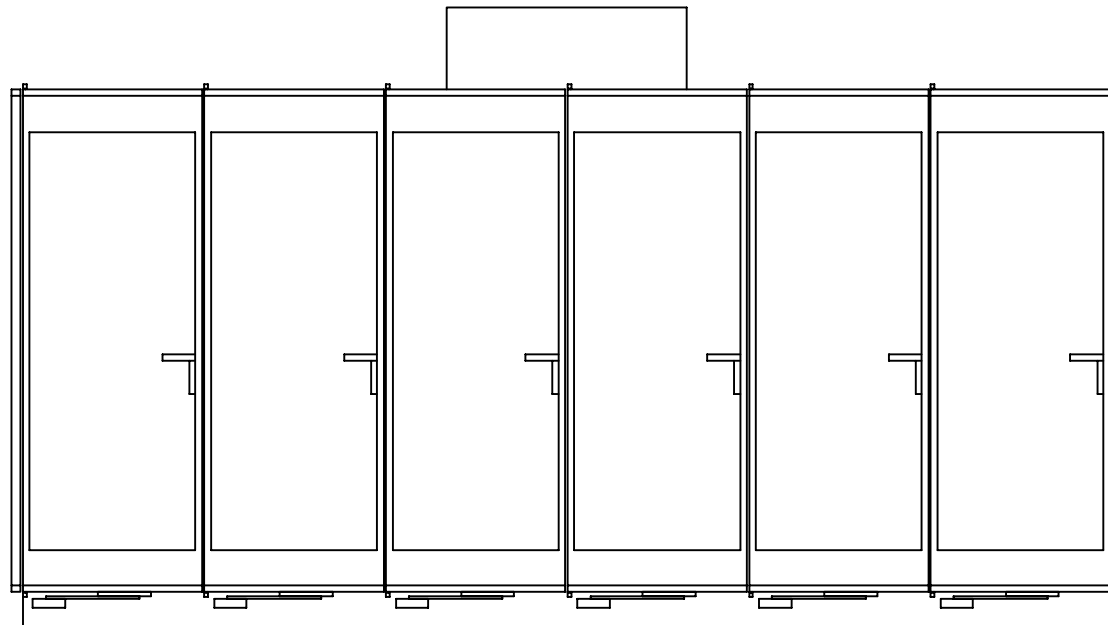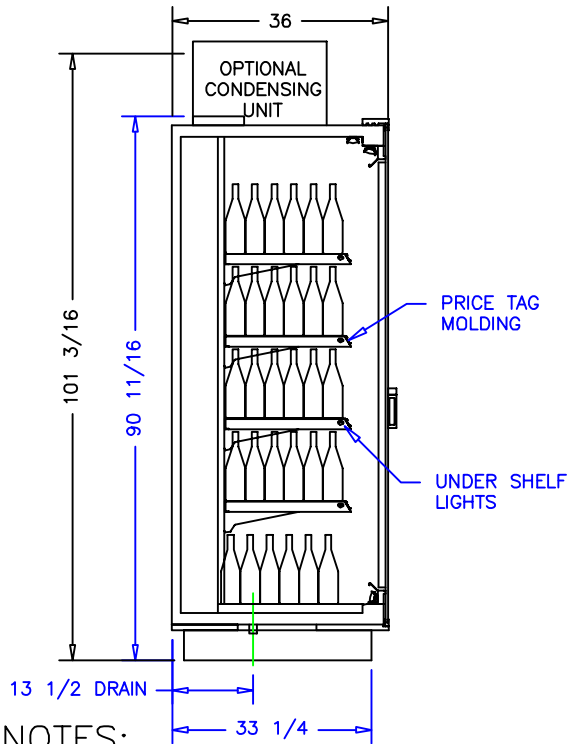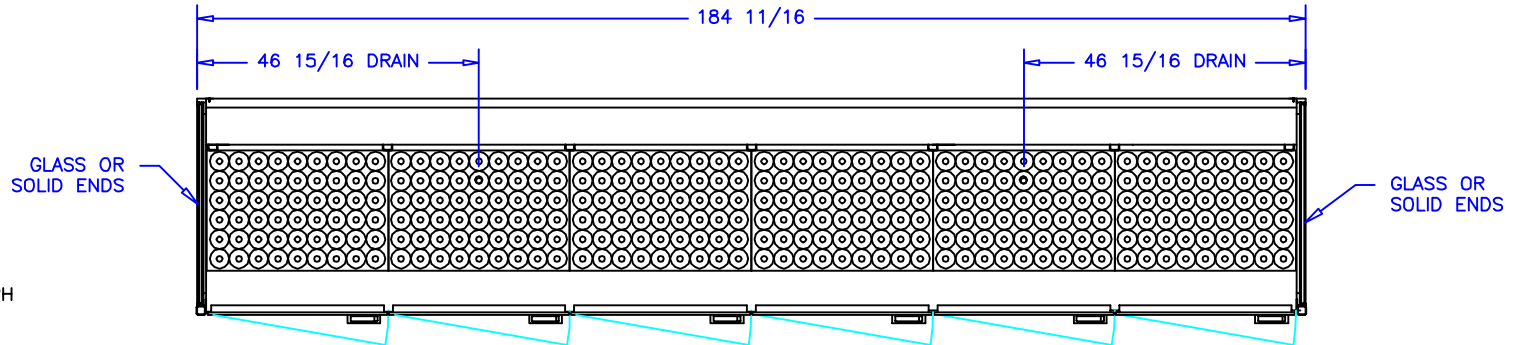

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:				 börger systems		DRAWN BY: D HUNT	
				SCALE: 1:32				CHECKED BY:	
				DATE: 8-18-09					
		2-12-15 DRH				6DR WINE TALL			
		4-28-10 DRH							
		DATE		REV.		DIM. INCH			
		REVISION		TOL.				DRAWING NUMBER P5691	