

REFRIGERATION:

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.3A
LIGHTS: 6.0A
CONDENSATE PUMP: 1.0A
CONDENSATE PAN: 3.0A
TOTAL: 10.3A
MCA: 15.0A

36



24

15 1/16

9/16 DRAIN

GLASS OR SOLID ENDS

GLASS OR SOLID ENDS

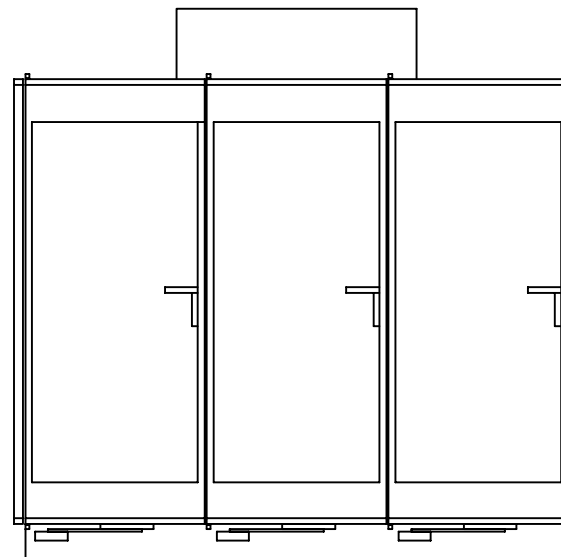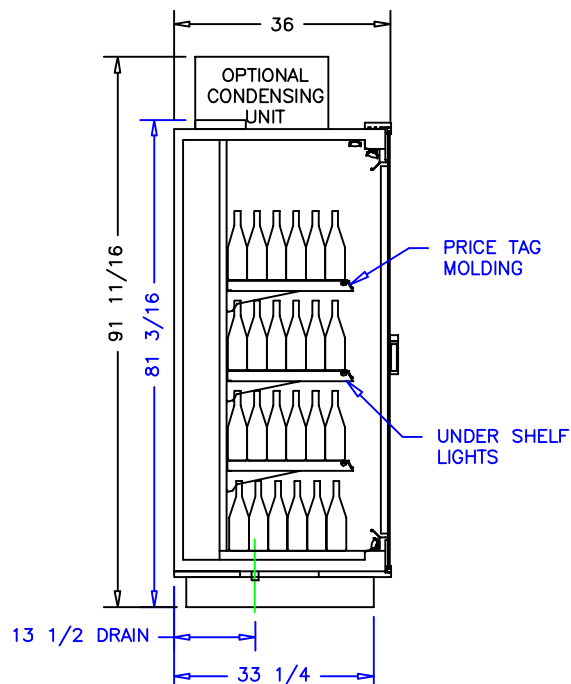

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

[illegible]