
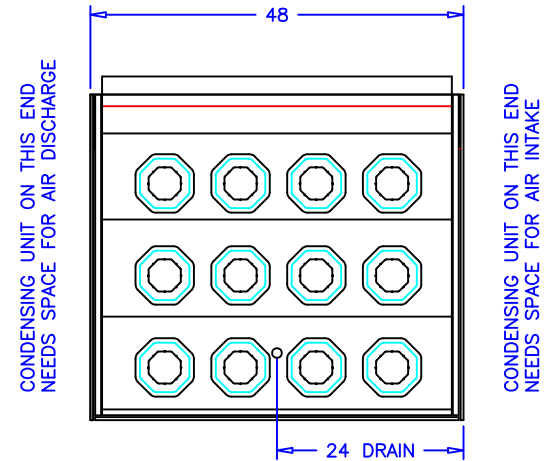


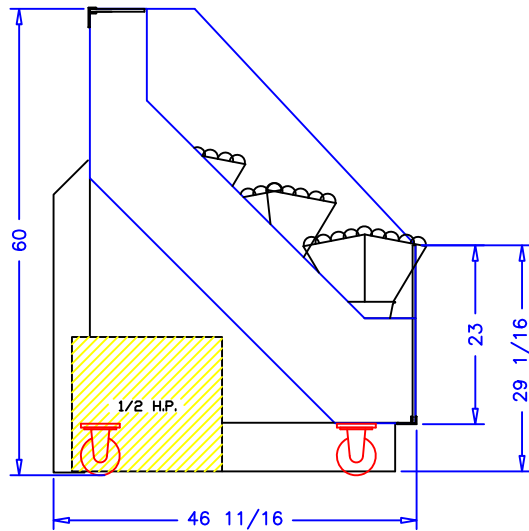

CASE SPECIFICATIONS:


REFRIGERATION:
 LOAD: 3,960 BTU/hr
 SUCTION TEMP: 20°F
 SUCTION LINE: 5/8" IN ODS
 LIQUID LINE: 3/8" IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 EVAP. FANS: 0.30A
 LIGHTS: N/A
 CONDENSATE PUMP: 1.0A
 TOTAL: 1.30A

CU ELECTRICAL 230V, 60HZ, 1PH
 1/2HP COND. UNIT: 6.7A
 EVAP. PAN: 6.5A
 TOTAL: 13.2A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELECTRICAL CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

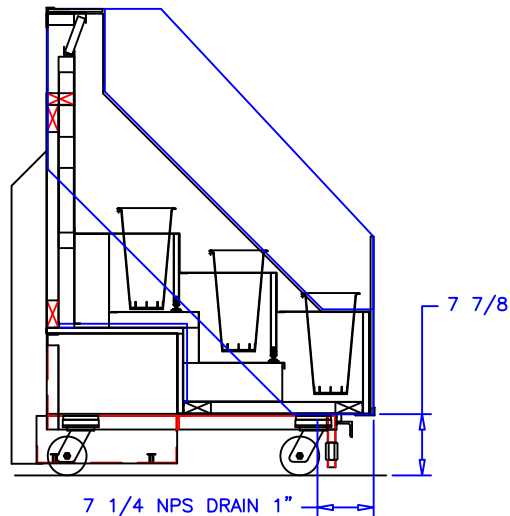

AUTHORIZATION (PRINT):		DATE:		 börger systems		SCALE: 1:16		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 2-17-04		CHECKED BY: NAME	
				12-22-09		SEH		4' HP LPM (OCU)	
DATE		REV.		DIM: INCH				DRAWING NUMBER	
REVISION				TOL: ±1/32				P6019	