
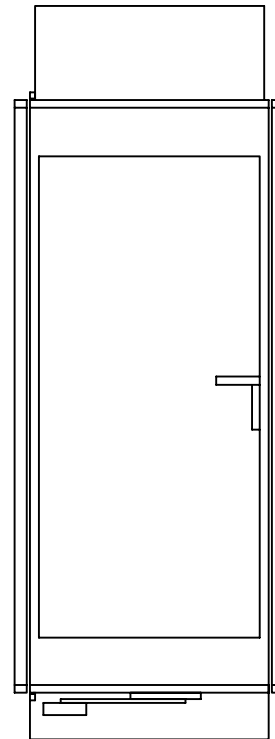


CASE SPECIFICATIONS:


REFRIGERATION:  
 LOAD: 2,100 BTU/hr  
 COIL TEMP: 30°F  
 SUCTION STUB: 5/8IN ODS  
 LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH  
 EVAP. FANS: 0.3A  
 LIGHTS: 2.4A  
 CONDENSATE PUMP: 1.0A  
 CONDENSATE PAN: 3.0A  
 1/3 HP COND. UNIT: 6.0A  
 TOTAL: 12.7A  
 MCA: 25.0A

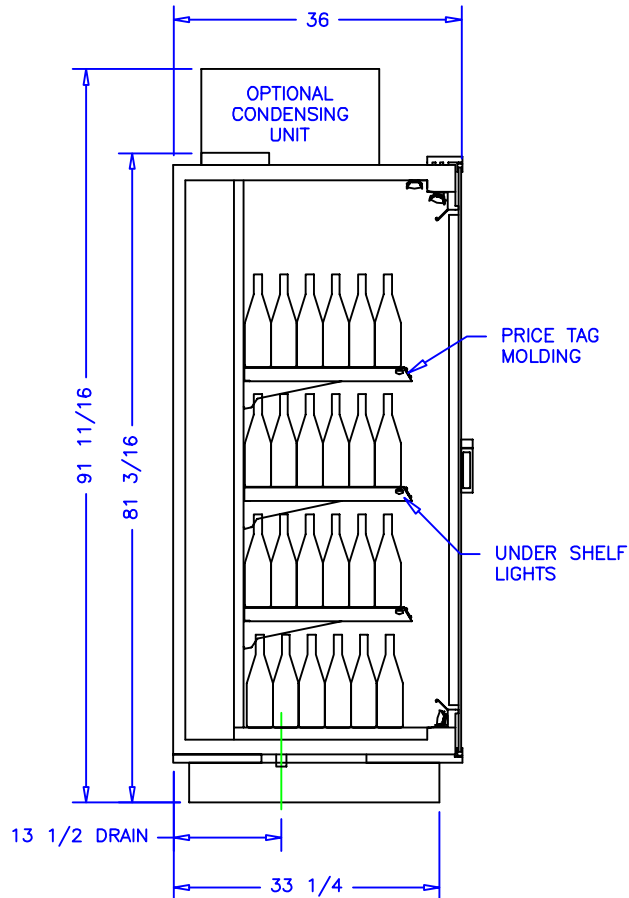

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 <b>börger systems</b>		DRAWN BY: D HUNT
				SCALE: 1:24
		DATE: 5-6-11	1DR WINE	
		2-12-15 DRH		
DATE	REV.	DR:	INCH	DRAWING NUMBER
REVISION	TOL:			P6032