
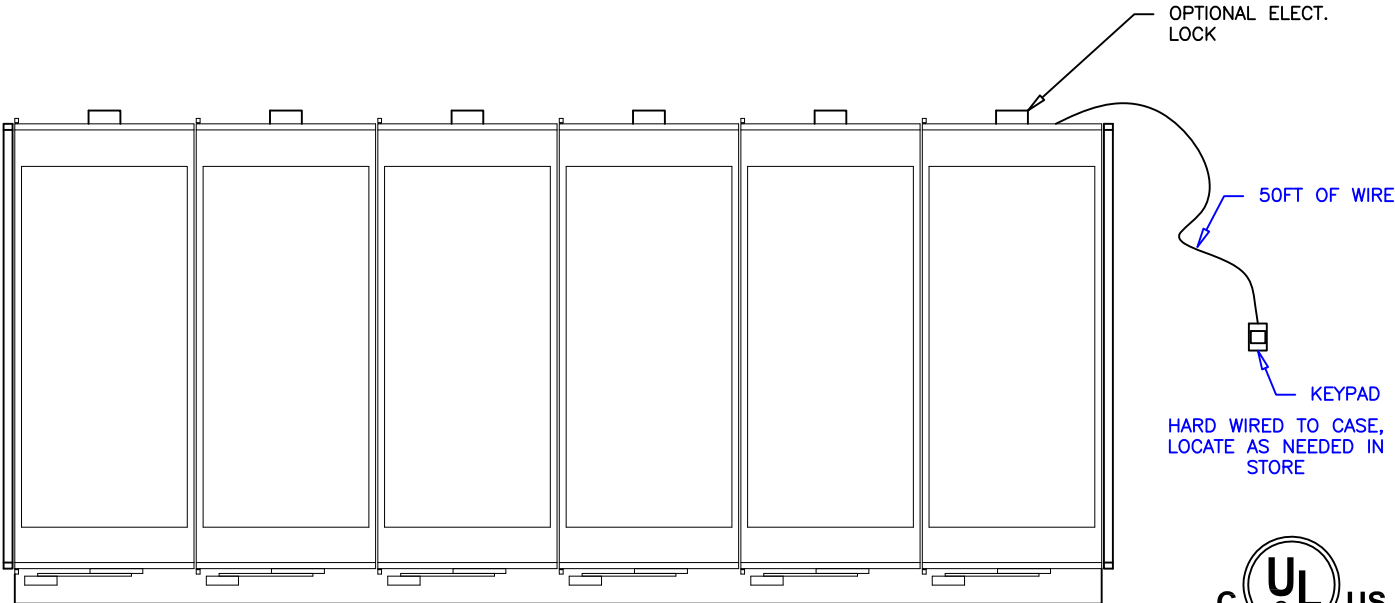
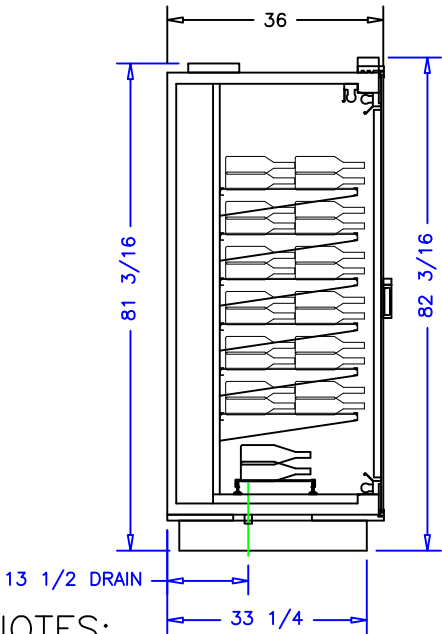


CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 6,384 BTU/hr
SUCTION TEMP: 30°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.9A
LIGHT BALLASTS: 2.40A
TOTAL: 3.3A
MCA: 15.0A

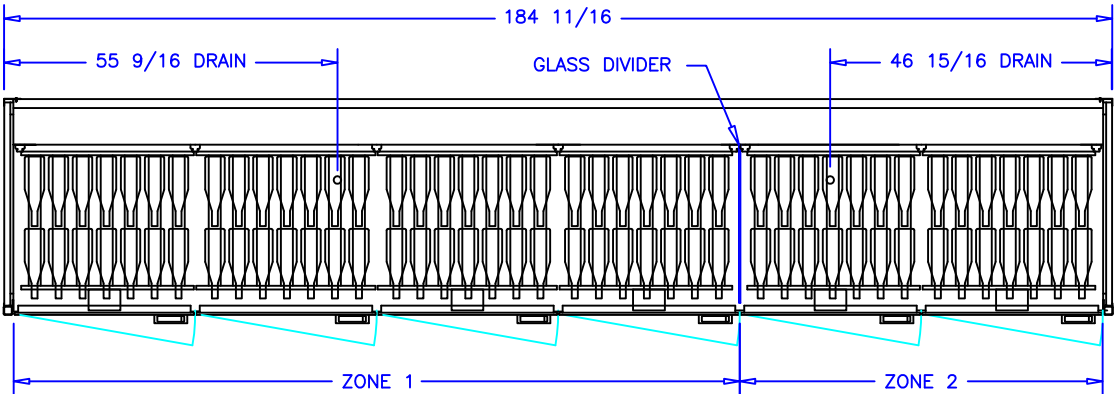


OPTIONAL ELECT. LOCK
50FT OF WIRE
KEYPAD
HARD WIRED TO CASE, LOCATE AS NEEDED IN STORE



37X1
COMMERCIAL REFRIGERATOR
LESS CONDENSING UNIT

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:				SCALE: 1:24		DRAWN BY: D HUNT			
						DATE: 5-16-11		CHECKED BY:			
				6DR WINE							
				DATE		REV.		DIM: INCH		DRAWING NUMBER	
				REVISION		TOL:		P6036			