




CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 4,850 BTU/hr
 COIL TEMP: 30°F
 SUCTION STUB: 5/8IN ODS
 LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH

EVAP. FANS: 0.90A
 CASE LIGHTS: 3.6A
 SHELF LIGHTS: TBD
 TOTAL:
 MCA:

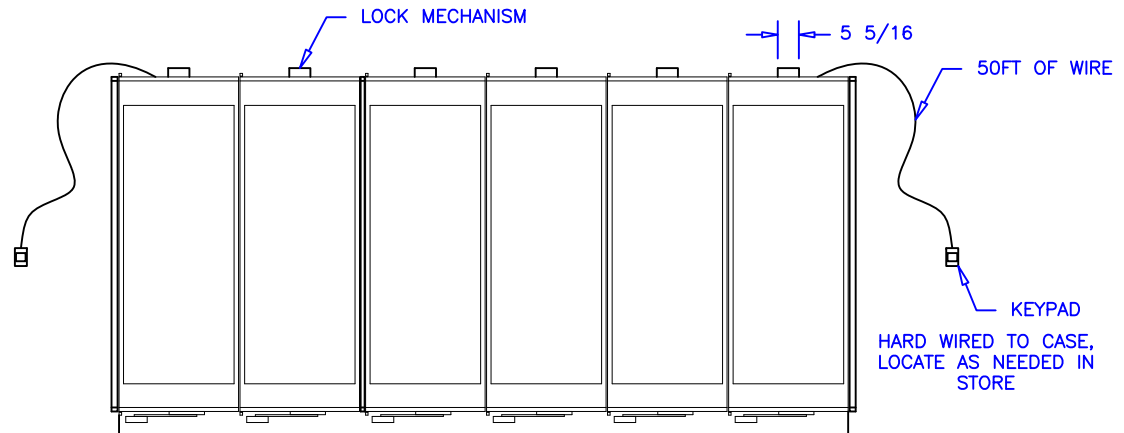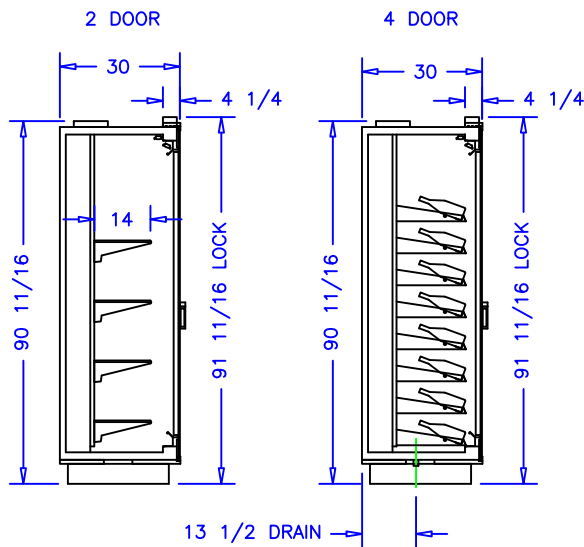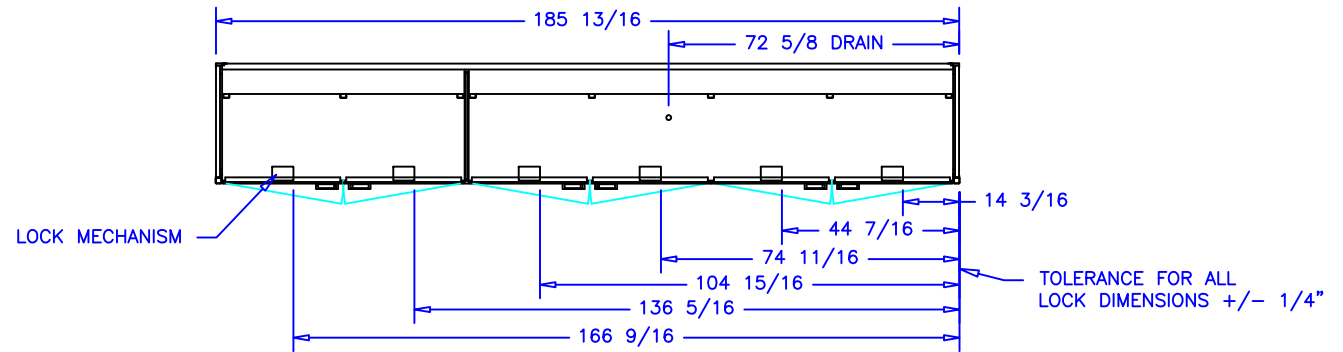


NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



37X1
 COMMERCIAL REFRIGERATOR
 LESS CONDENSING UNIT

AUTHORIZATION (PRINT):		DATE:		 börger systems		SCALE: 1:48 DATE: 2-3-12		DRAWN BY: D HUNT CHECKED BY:			
				6DR WINE TALL							
				DATE		REV.		DIM: INCH		DRAWING NUMBER	
				REVISION		TOL:		P6169			