


# CASE SPECIFICATIONS:

## REFRIGERATION:

LOAD: 3,800 BTU/hr  
SUCTION TEMP: 30°F  
SUCTION LINE: 5/8IN ODS  
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH  
EVAP. FANS: 0.30A  
LED LIGHT: 4.8A  
TOTAL: 5.1A  
MCA: 15.0A

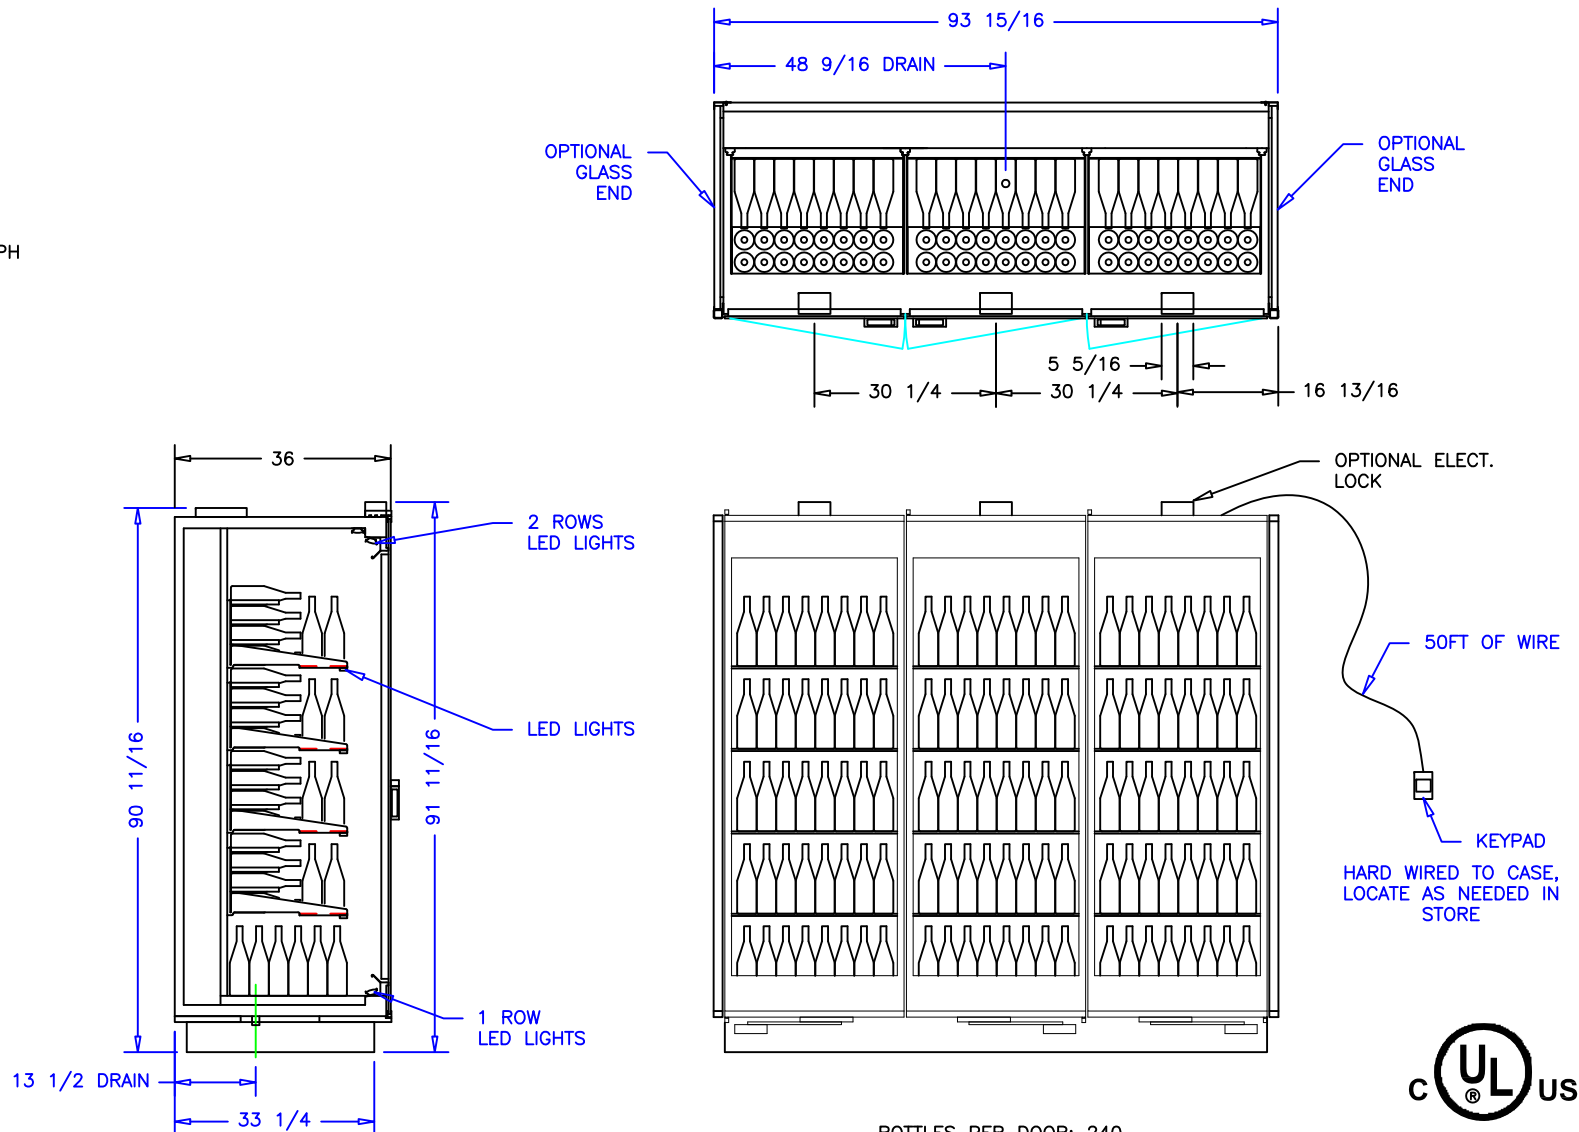

BOTTLES PER DOOR: 240  
TOTAL FOR CASE: 720



## NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:				börger systems	
				SCALE: 1:32		DRAWN BY: D HUNT	
				DATE: 10-24-12		CHECKED BY:	
				3DR WINE TALL			
DATE		REV.		DIM: INCH		DRAWING NUMBER	
REVISION		TOL:				P6319	