
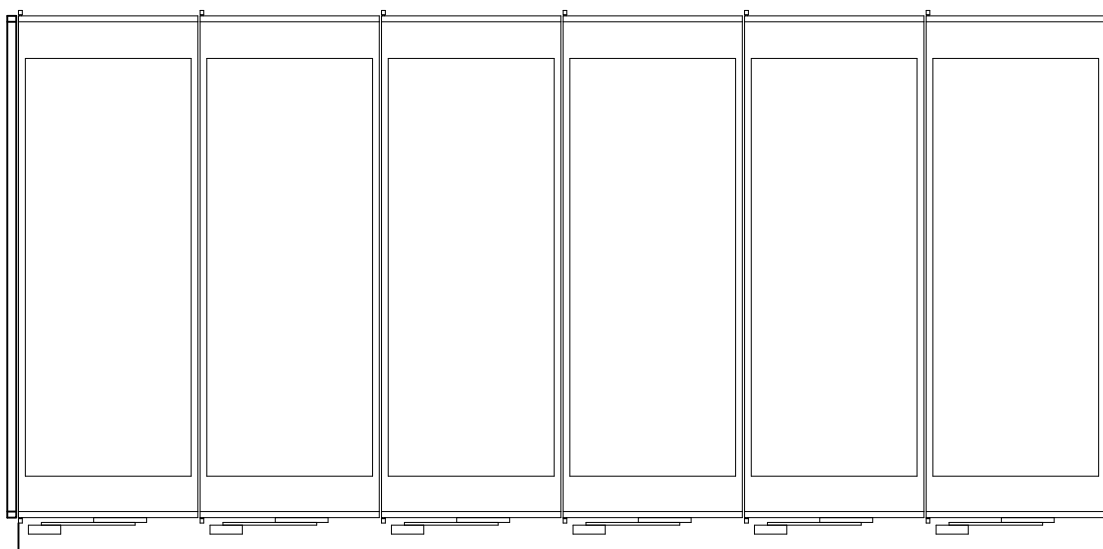
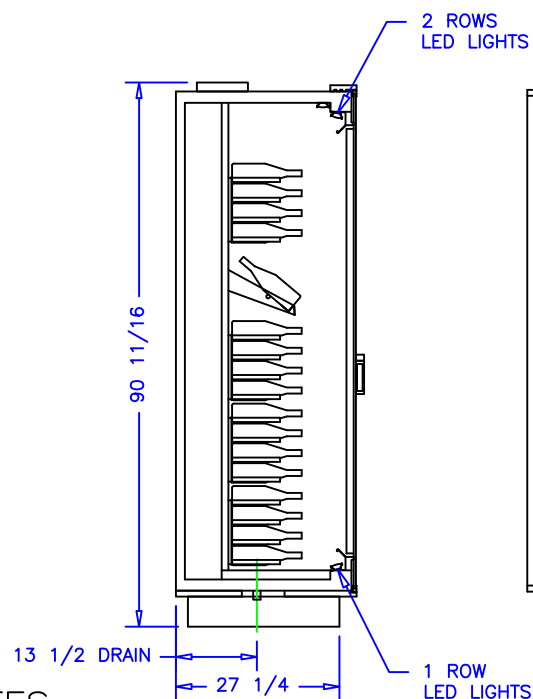



REFRIGERATION:

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.60A
LED LIGHT: 4.8A
TOTAL: 5.4A
MCA: 15.0A

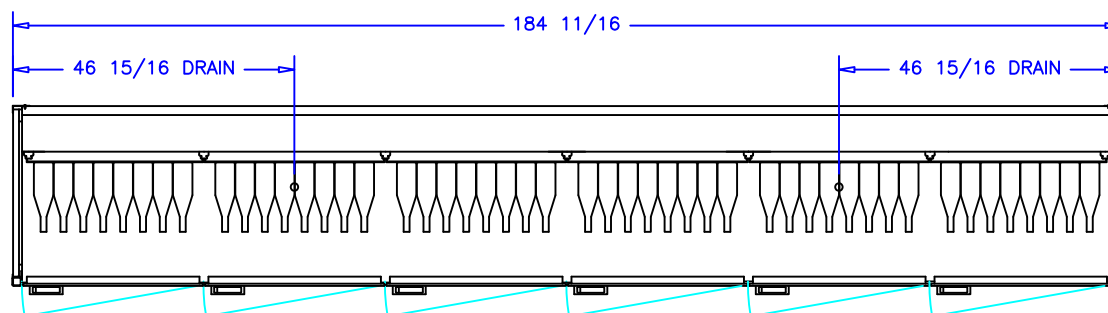

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			 börgen systems	SCALE: 1:32	DRAWN BY: D HUNT	
					DATE: 10-25-12	CHECKED BY:	
				6DR WINE TALL			
		DATE	REV.	DIM:	INCH	DRAWING NUMBER	
		REVISION		TOL:		P6323	

