


## CASE SPECIFICATIONS:

REFRIGERATION: LOAD: 2,425 BTU/hr COIL TEMP: 30°F SUCTION STUB: 5/8IN ODS LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH EVAP. FANS: 0.30A CASE LIGHTS: 2.4A SHELF LIGHTS: TBD TOTAL: MCA:

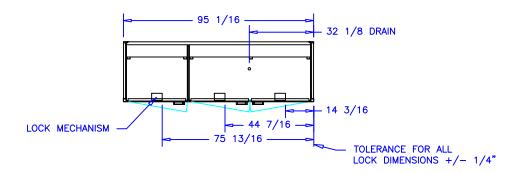

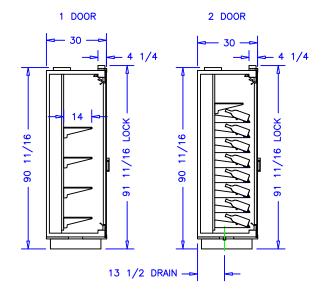

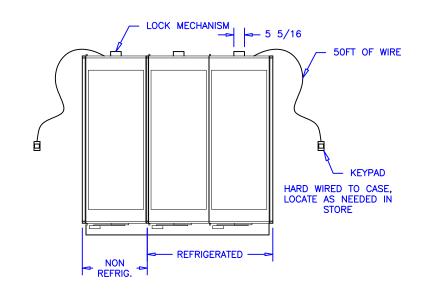

## NOTES:

- OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
- 2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
- 3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
- DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLER).
- 5. THERMOSTATS & LÍQUID LINE SOLENOID VALVES: OPTIONAL.
- 6. DRAIN: 1 1/2 INCH PVC.
- 7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



37X1 COMMERCIAL REFRIGERATOR LESS CONDENSING UNIT

Α	AUTHORIZATION (PRINT):	DATE:					••	1		
					_F		örgen sys	items i		
					1	~	3 7 -			
					SCALE:	1:48		DRAWN BY: D HUNT		
Г					DATE:	1-24-13		CHECKED BY:		
							3DR WINE TALL			
					JUN WINE TALL					
			DATE	REV.	DIM:	INCH	BRISTOL FARMS	DRAWING NUMBER		
			REVISION		TOL:		SANTA MONICA	P6356		