

CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 2,425 BTU/hr

COIL TEMP: 30°F

SUCTION STUB: 5/8IN ODS

LIQUID STUB: 3/8IN ODS




ELECTRICAL 115V, 60HZ, 1PH

EVAP. FANS: 0.30A

CASE LIGHTS: 2.4A

TOTAL: 2.7A

MCA: 15.0A

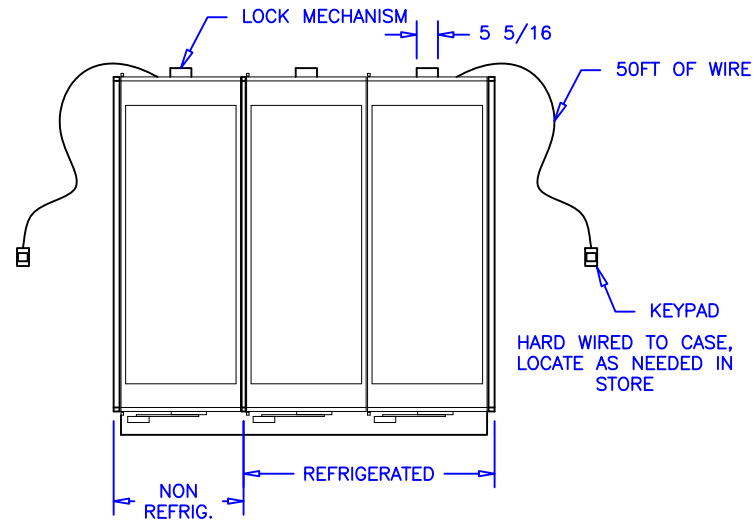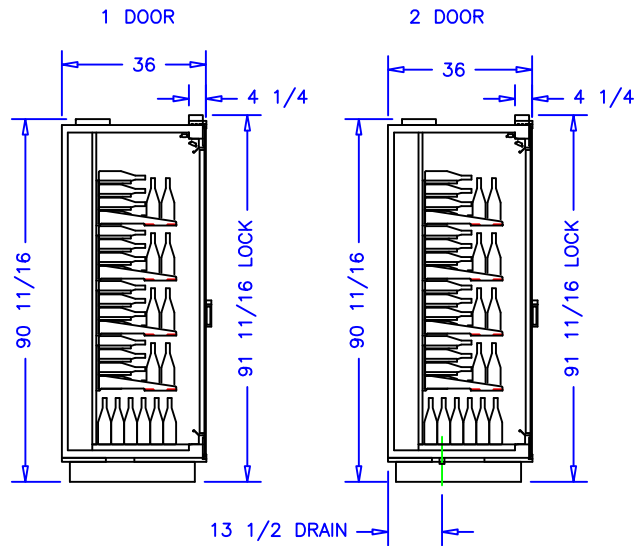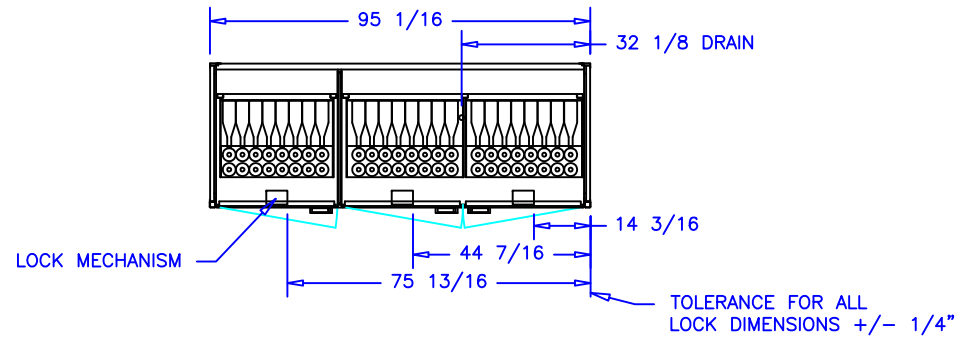

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



37X1
COMMERCIAL REFRIGERATOR
LESS CONDENSING UNIT

AUTHORIZATION (PRINT):		DATE:				börger systems		DRAWN BY: D HUNT	
						SCALE: 1:48		CHECKED BY:	
						DATE: 1-24-13			
						3DR WINE TALL			
						DATE REV DIM INCH		DRAWING NUMBER	
						REVISION TOL:		P6357	