
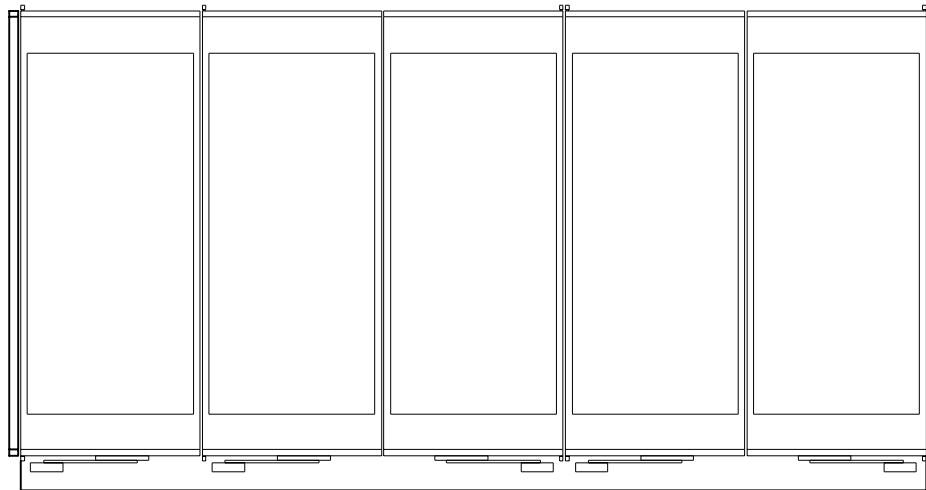
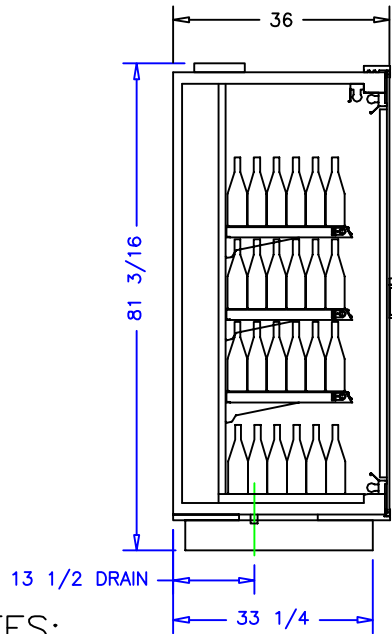


CASE SPECIFICATIONS:

REFRIGERATION:


LOAD: 6,070 BTU/hr
 SUCTION TEMP: 30°F
 SUCTION LINE: 5/8IN ODS
 LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 EVAP. FANS: 0.6A
 LIGHT BALLASTS: 6.0A
 TOTAL: 6.6A
 MCA: 15.0A

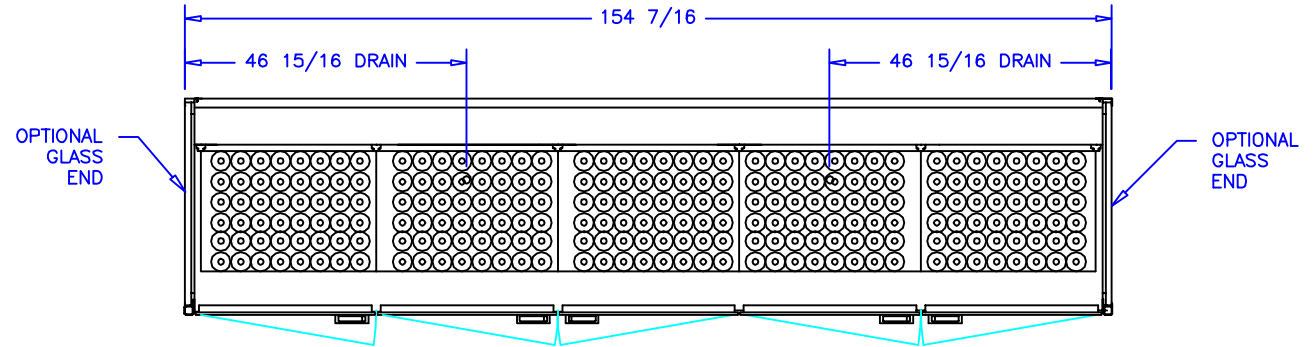

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			 börigen systems		DRAWN BY: D HUNT
		SCALE: 1:24	DATE: 10-22-13			CHECKED BY:
		5DR WINE				
DATE	REV.	DWG.	INCH			DRAWING NUMBER
REVISION		TOL:				P6529