


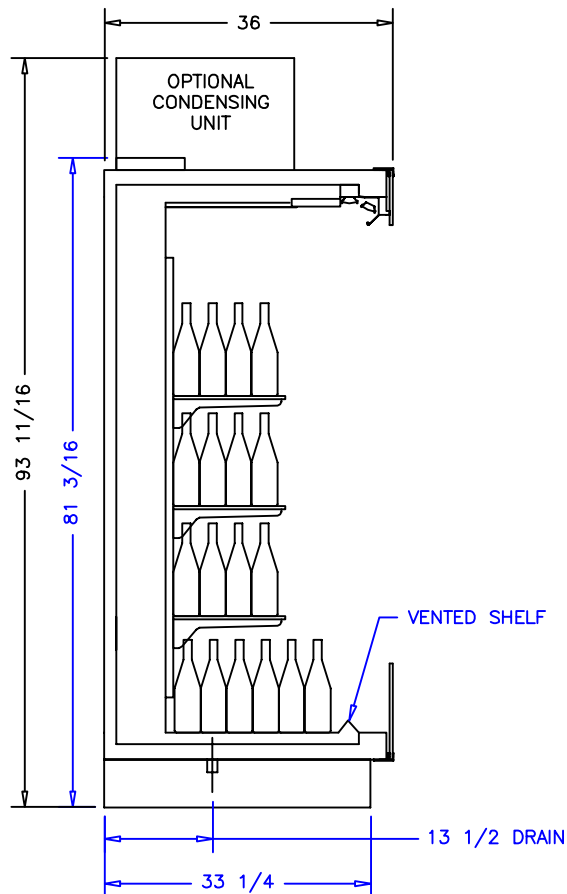

CASE SPECIFICATIONS:

REFRIGERATION


LOAD: 7,700 BTU/hr
 SUCTION TEMP: 30° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: .60A
 LIGHTS: 3.6A
 CONDENSATE PUMP: 1.0A
 TOTAL: 5.2A
 MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.

EVAP. PAN: 6.5A
 1HP COND. UNIT: 7.7A
 TOTAL: 14.2A
 MCA: 17.3A

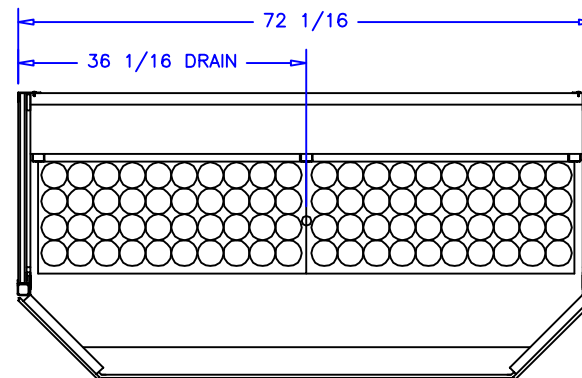

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:24	DRAWN BY: D HUNT
				DATE: 6-18-15	CHECKED BY:
		6FT OPEN BAYS WINE			
DATE	REV.	DWG.	INCH		
REVISION	TOL.				
				DRAWING NUMBER P6856	