
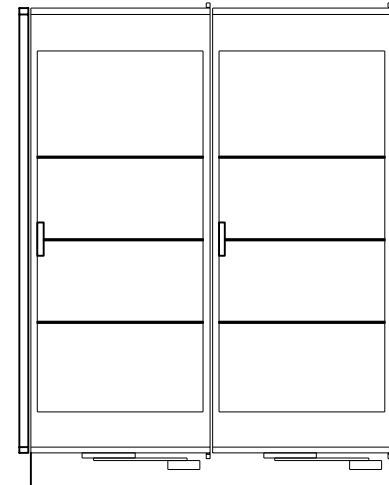
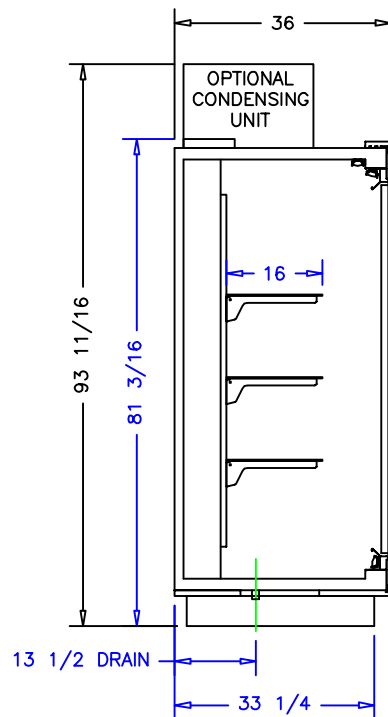


CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 2,900 BTU/hr
 COIL TEMP: 25°F
 SUCTION STUB: 5/8IN ODS
 LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 EVAP. FANS: 0.30A
 LED LIGHT: 1.2A
 CONDENSATE PUMP: 1.0A
 CONDENSATE PAN: 5.2A
 1/2 HP COND. UNIT: 9.2A
 TOTAL: 16.9A
 MCA: 25.0A

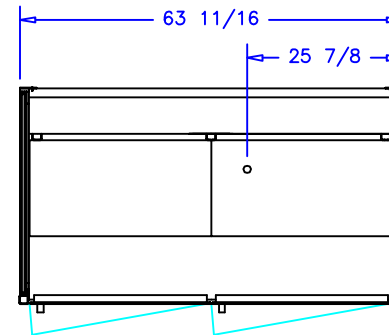

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



37X1
 COMMERCIAL REFRIGERATOR
 LESS CONDENSING UNIT

AUTHORIZATION (PRINT):		DATE:		 börger systems		SCALE: 1:32		DRAWN BY: D HUNT			
						DATE: 3-24-16		CHECKED BY:			
				2 DOOR							
				DATE		REV.		DIM: INCH		DRAWING NUMBER P7065	
				REVISION		TOL:					