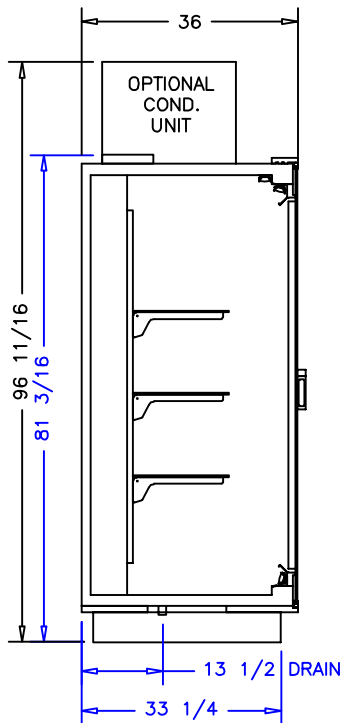
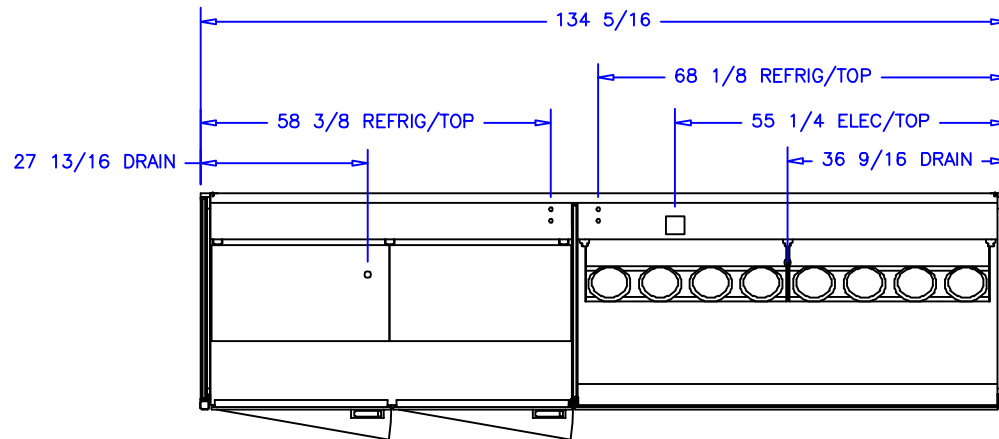


#### CASE SPECIFICATIONS:

REFRIGERATION  
DOORED LOAD: 1,875 BTU/hr  
OPEN LOAD: 9,900 BTU/hr  
TOTAL: 11,775 BTU/hr  
COIL TEMP: 25°  
LIQUID STUB: 3/8IN ODS  
SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.  
EVAP. FANS: 1.2A  
LIGHTS: 3.6A  
CONDENSATE PUMP: 1.0A  
TOTAL: 5.8A  
MCA: 15A

ELECTRICAL 230VAC, 60HZ, 1PH.  
EVAP. PAN: 7.2A  
1 1/2HP COND. UNIT: 10.9A  
TOTAL: 18.1A  
MCA: 23.7A

#### NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):

DATE:

SIGNATURE:



**börger systems**

SCALE: 1:32

DATE: 5-12-16

DRAWN BY: D HUNT

CHECKED BY:

2DR / 6FT DF CMB RIGHT

DATE REV. DIM. INCH

REVISION TOTL

DRAWING NUMBER

P7092