
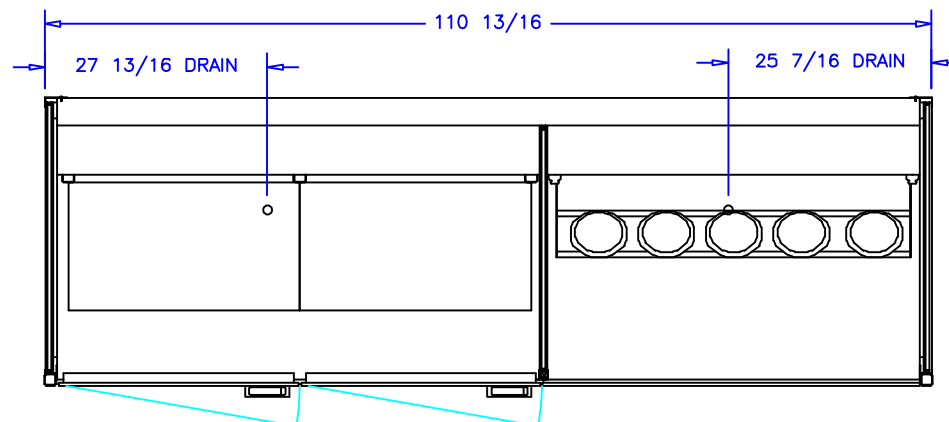
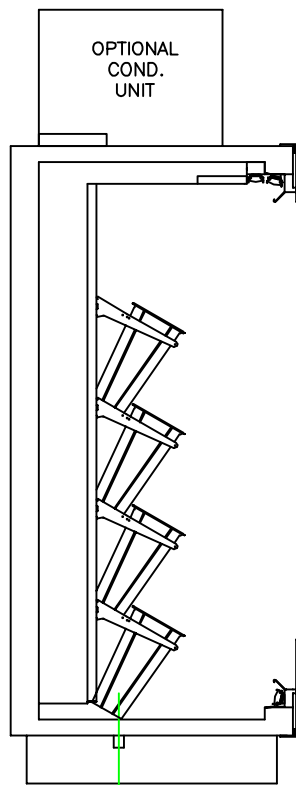


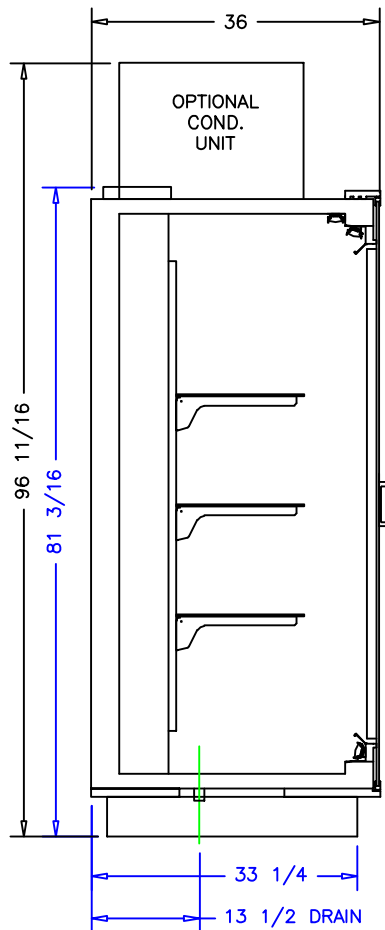

CASE SPECIFICATIONS:

REFRIGERATION

DOORED: 2,300 BTU/hr
 OPEN: 5,800 BTU/hr
 TOTAL: 8,100 BTU/hr
 SUCTION TEMP: 25° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .90A
 LIGHTS: 3.6A
 COND. PUMP: 1.0A
 TOTAL: 5.5A
 MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
 COND. PAN: 7.2A
 1 1/4HP COND. UNIT: 9.2A
 TOTAL: 16.4A
 MCA: 20.0A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
		SCALE: 1:24	DRAWN BY: D HUNT		
		DATE: 3-27-18	CHECKED BY:		
		2DR 4FT OPEN RIGHT COMBO			
DATE	REV.	DWG.	INCH	DRAWING NUMBER	
REVISION	TOL:			P7519	