
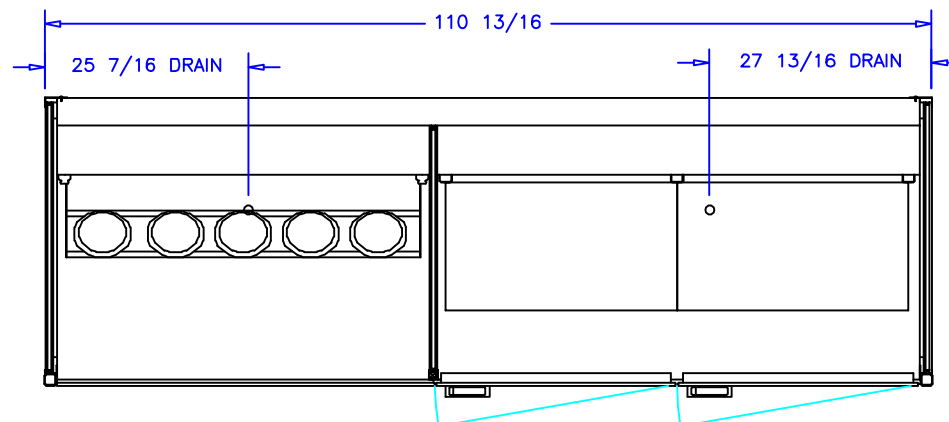
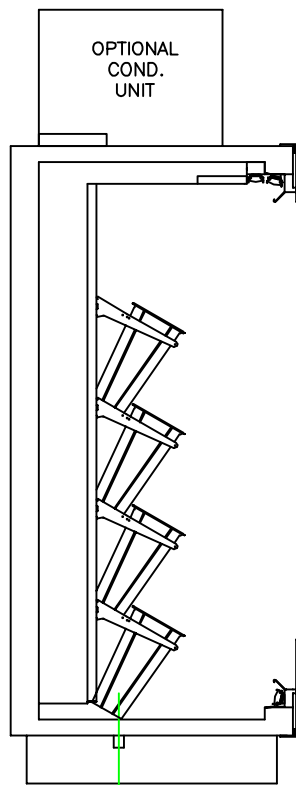


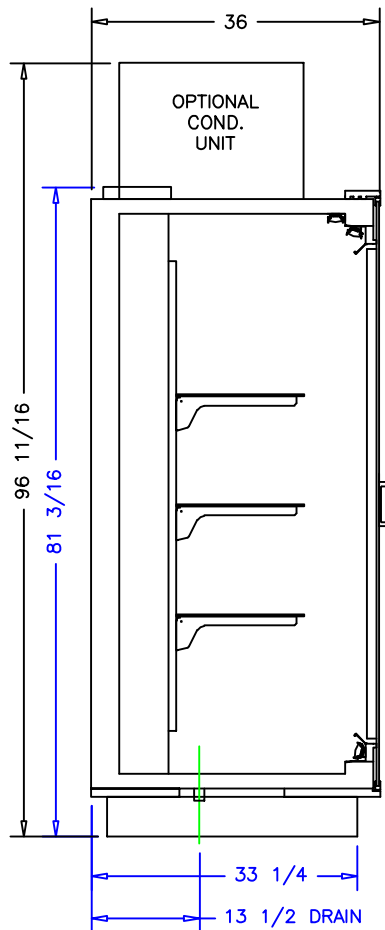

#### CASE SPECIFICATIONS:

##### REFRIGERATION

DOORED: 2,300 BTU/hr  
 OPEN: 5,800 BTU/hr  
 TOTAL: 8,100 BTU/hr  
 SUCTION TEMP: 25° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

##### ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: .90A  
 LIGHTS: 3.6A  
 COND. PUMP: 1.0A  
 TOTAL: 5.5A  
 MCA: 15.0A

##### ELECTRICAL 230VAC, 60HZ, 1PH.

COND. PAN: 7.2A  
 1 1/4HP COND. UNIT: 9.2A  
 TOTAL: 16.4A  
 MCA: 20.0A

#### NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):

DATE:

SIGNATURE:



**börgen systems**

SCALE: 1:24

DATE: 3-27-18

DRAWN BY: D HUNT

CHECKED BY:

2DR 4FT OPEN LEFT COMBO

DATE REV. DIM. INCH

REVISION

TOL:

DRAWING NUMBER

P7520