



CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 12,100 BTU/hr
 COIL TEMP: 22° F
 LIQUID STUB: 3/8IN ODS
 SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: 1.6A
 LED LIGHTS: 3.6A
 CONDENSATE PUMP: 1.0A
 TOTAL: 6.2A
 MCA: 15.0A


ELECTRICAL 230VAC, 60HZ, 1PH.
 EVAP. PAN: 7.2A
 1 1/2HP COND. UNIT: 12.9A
 TOTAL: 20.1A
 MCA: 24.8A

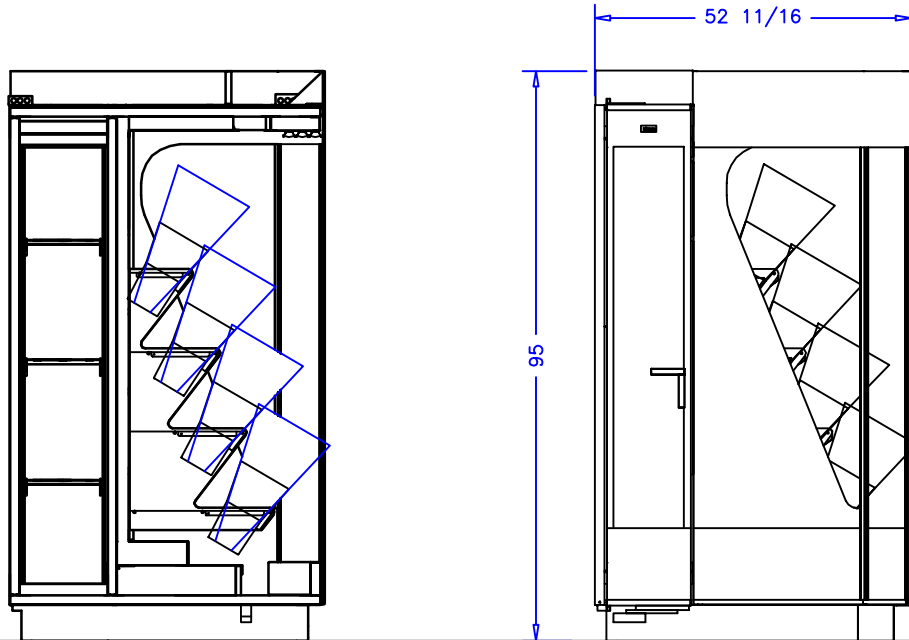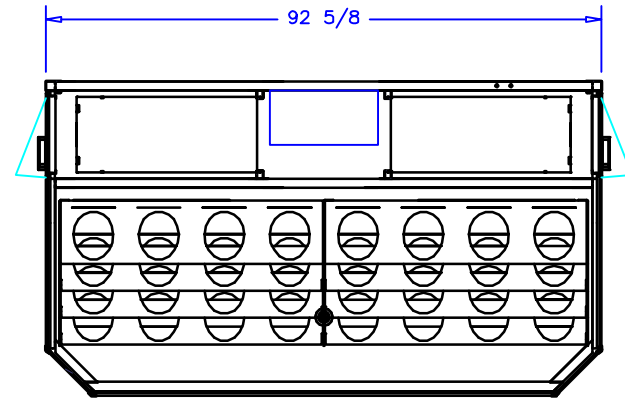

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börgeren systems		SCALE: 1:48		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 4-2-13		CHECKED BY:	
12-4-13		DRH		8FT OPEN BACK DISPLAY DOORS					
9-24-13		DRH							
DATE		REV.		DIM:		INCH		DRAWING NUMBER	
REVISION		TOL:						P6470	