
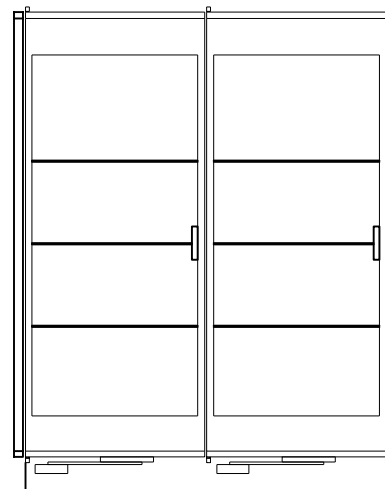
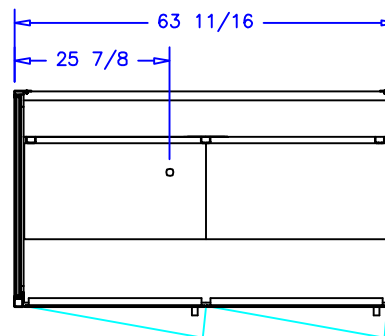


REFRIGERATION:
LOAD: 2,900 BTU/hr
COIL TEMP: 25°F
SUCTION STUB: 5/8IN ODS
LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.30A
LED LIGHT: 1.2A
CONDENSATE PUMP: 1.0A
CONDENSATE PAN: 5.2A
1/2 HP COND. UNIT: 9.2A
TOTAL: 16.9A
MCA: 25.0A

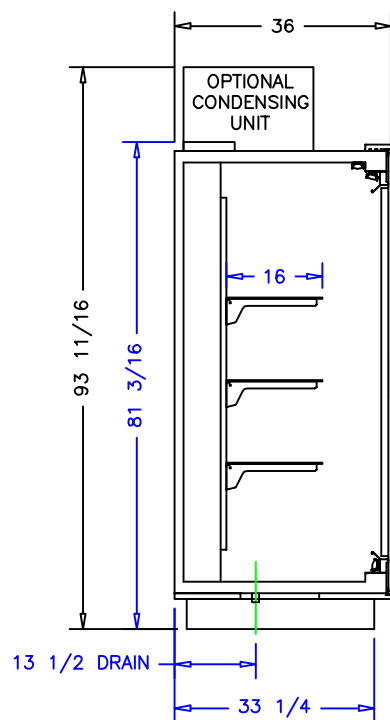

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:				börger systems		DRAWN BY: D HUNT
				SCALE: 1:32		CHECKED BY:	
				DATE: 3-24-16			
				2 DOOR			
		DATE:	REV.	DWG:	INCH	DRAWING NUMBER P7064	
		REVISION		TOL:			