
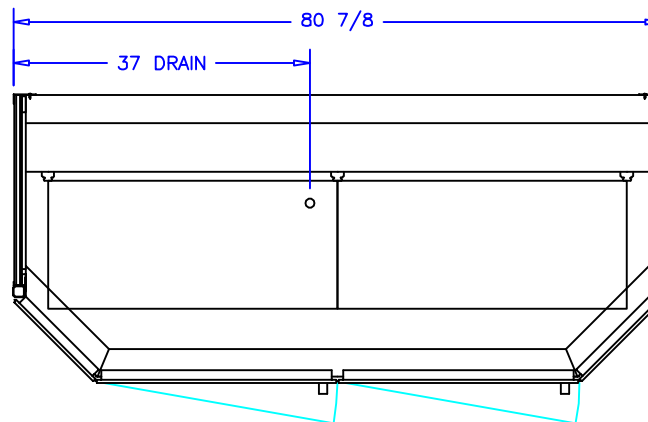


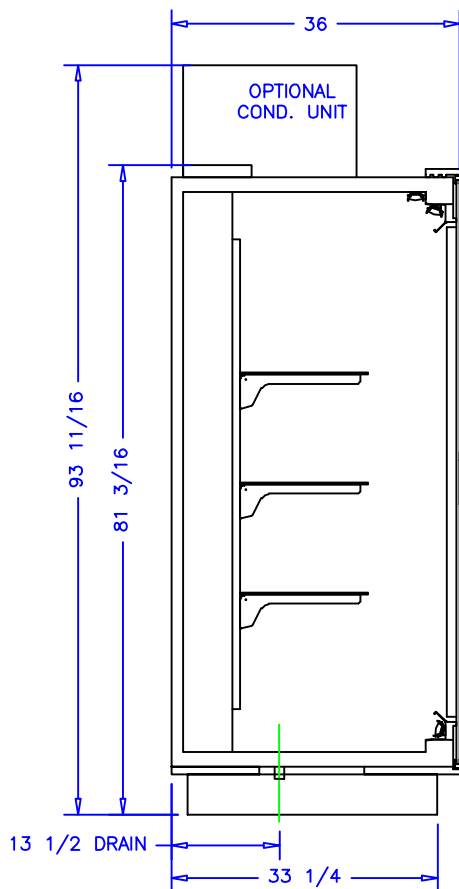

CASE SPECIFICATIONS:

REFRIGERATION:
 LOAD: 4,700 BTU/hr
 COIL TEMP: 30°F
 SUCTION STUB: 5/8IN ODS
 LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 1/2 HP COND. UNIT: 9.2A
 CONDENSATE PUMP: 1.0A
 CONDENSATE PAN: 3.0A
 EVAP. FANS: 0.6A
 LED LIGHTS: 2.4A
 TOTAL: 15.28A
 MCA: 18.98A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
		SCALE: 1:24		DRAWN BY: D HUNT	
		DATE: 6-20-16		CHECKED BY:	
		2DR 2BAY 2GE			
		DATE		REV.	
REVISION		TOL:		DRAWING NUMBER	
				P7108	