
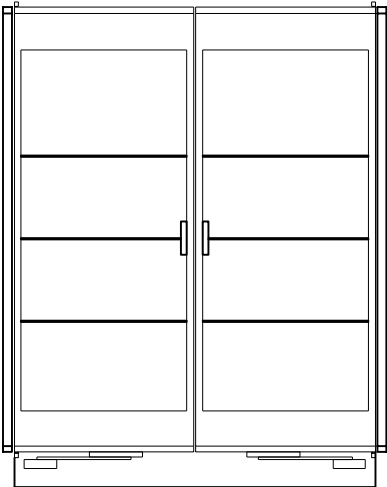
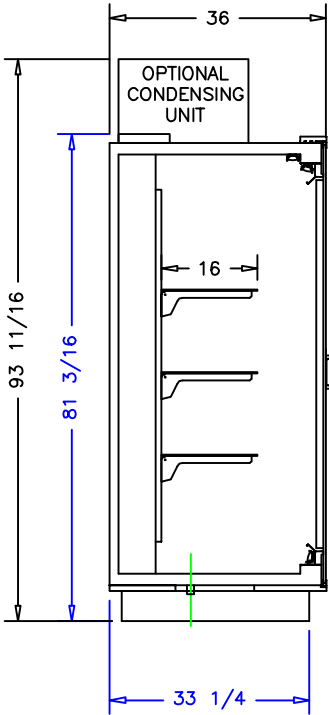


CASE SPECIFICATIONS:

REFRIGERATION:
LOAD: 1,875 BTU/hr
COIL TEMP: 25°F
SUCTION STUB: 5/8IN ODS
LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.30A
LED LIGHT: 1.2A
CONDENSATE PUMP: 1.0A
CONDENSATE PAN: 5.2A
1/2 HP COND. UNIT: 9.2A
TOTAL: 16.9A
MCA: 25.0A

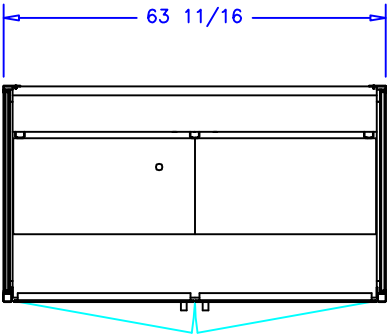

- NOTES:
1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
 2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
 3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
 4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
 5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
 6. DRAIN: 1 1/2 INCH PVC.
 7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:				SCALE: 1:32		DRAWN BY: D HUNT			
						DATE: 6-20-16		CHECKED BY:			
				2 DOOR							
				DATE		REV.		DIM.		INCH	
				REVISION		TOL.				DRAWING NUMBER P7109	