

LEFT CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 5,200 BTU/hr
SUCTION TEMP: 22° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 0.8A
LIGHTS: 3.6A
CONDENSATE PUMP: 1.0A
EVAP. PAN: 13.0A
TOTAL: 18.4A
MCA: 25.0A




RIGHT CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 5,200 BTU/hr
SUCTION TEMP: 22° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 0.8A
LIGHTS: 3.6A
CONDENSATE PUMP: 1.0A
TOTAL: 5.4A
MCA: 15.0A

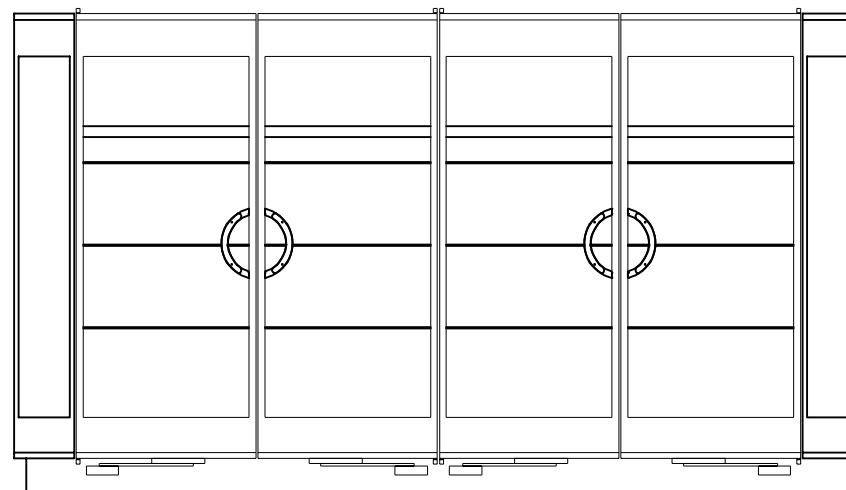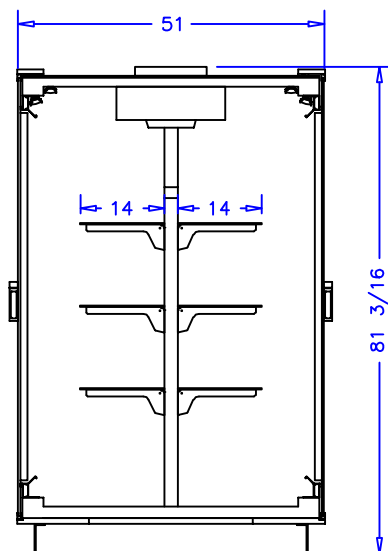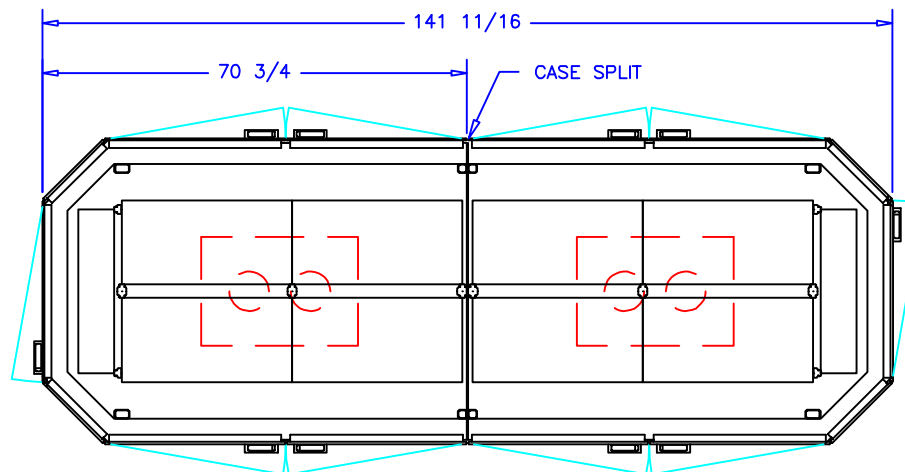

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems		DRAWN BY: D HUNT	
SIGNATURE:						CHECKED BY:	
				SCALE: 1:32		10DR SEE THRU	
				DATE: 1-2-17			
				1-31-18 DRH			
DATE		REV.		DIM: INCH		DRAWING NUMBER P7465	
REVISION		TOL:					