

**CASE SPECIFICATIONS:**





TOP AREA: 256 SQR FT

REFRIGERATION:  
LOAD: 18,500 BTU/hr  
COIL TEMP: 35° F

(3) BOHN WK075 COILS  
115VAC, 2.7A

AUTO SLIDER DOOR  
115VAC: 2.5A OR  
208VAC: 1.5A


ESTIMATED LED  
TRACK LIGHTING  
115VAC: 15.0A

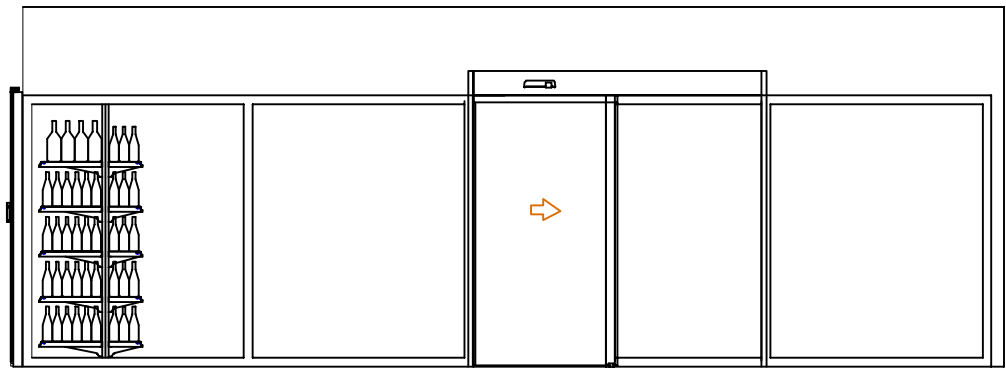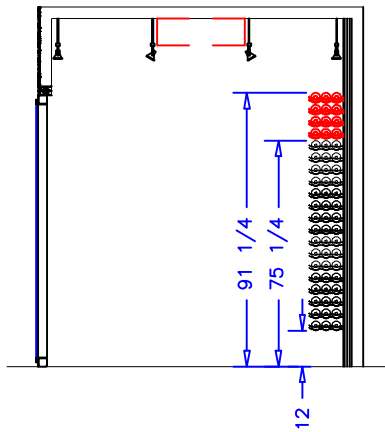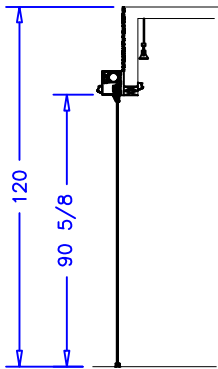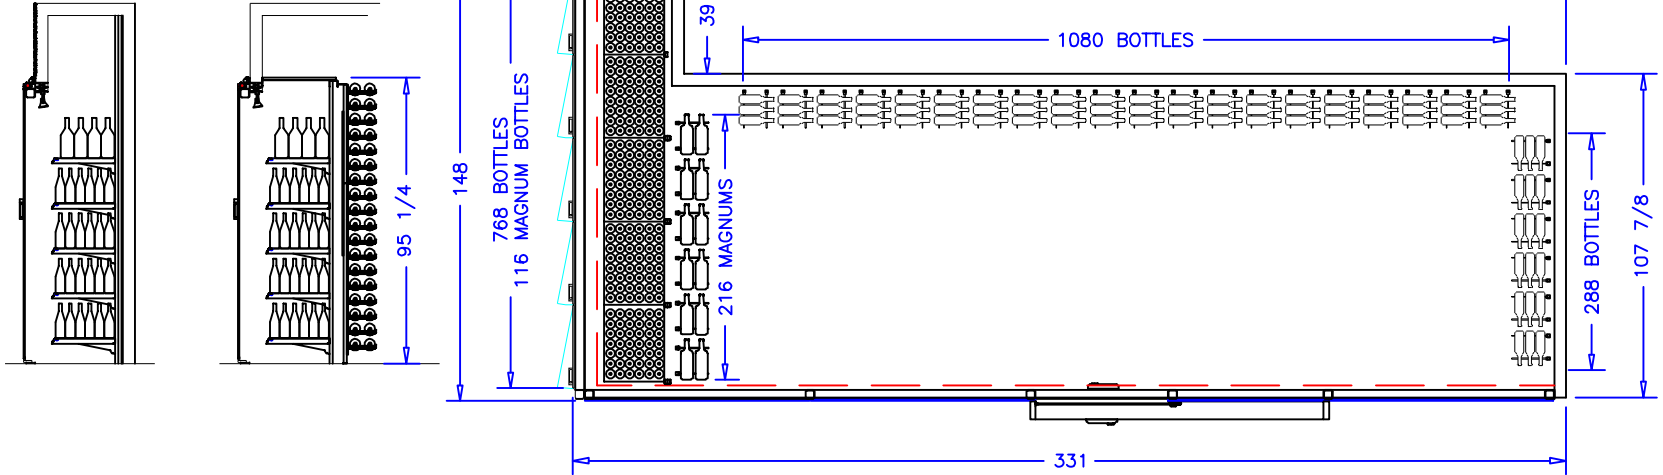

**NOTES:**

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):	DATE:	8-11-17 DRH	 börigen systems	SCALE: 1:48	DRAWN BY: D HUNT		
SIGNATURE:		8-9-17 DRH		9-7-16 DRH	DATE: 4-27-16	CHECKED BY:	
		8-3-17 DRH		8-12-16 DRH	WINE CELLAR		
		9-9-16 DRH		8-11-16 DRH			
		DATE		REV.	DWG.	INCH	DRAWING NUMBER
		REVISION		TOL:			P7089