
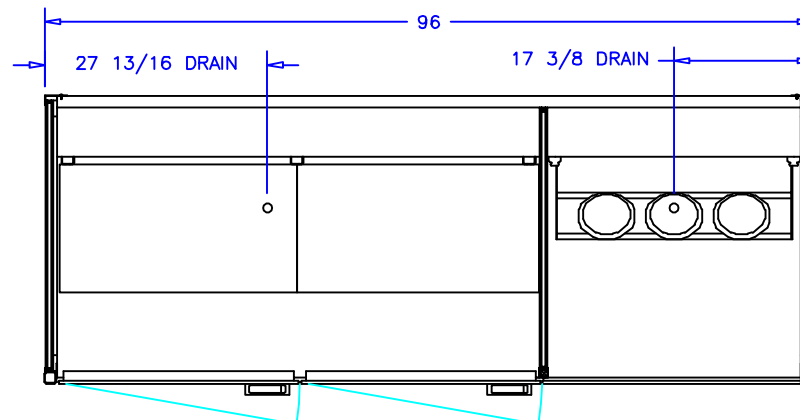


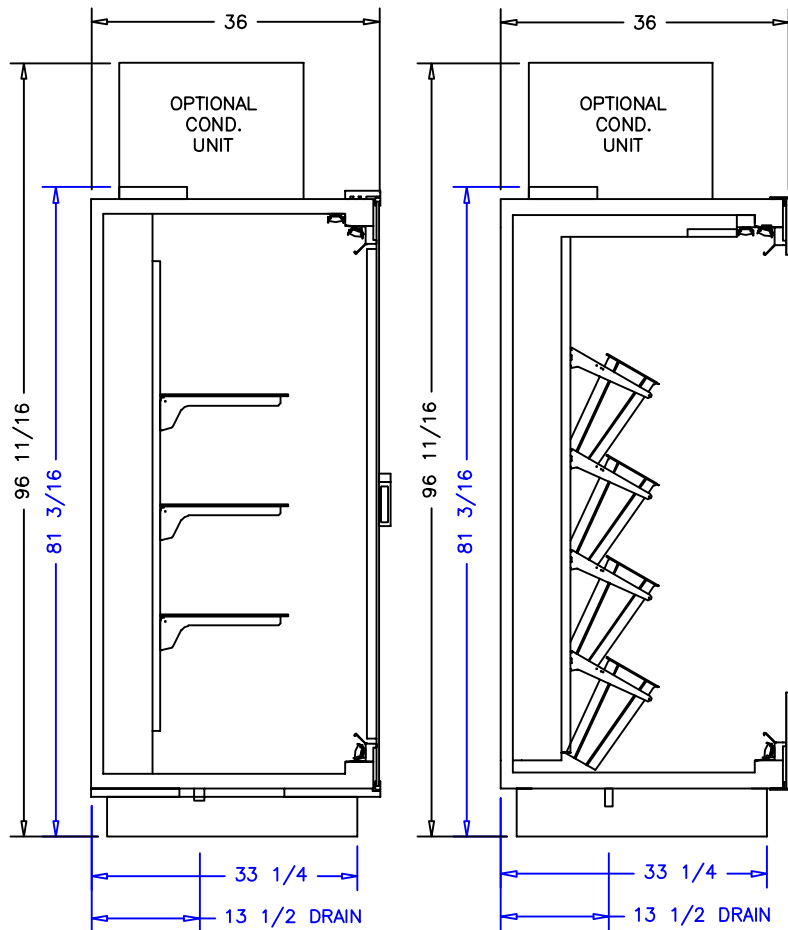

CASE SPECIFICATIONS:

REFRIGERATION

DOORED: 1,875 BTU/hr
 OPEN: 4,350 BTU/hr
 TOTAL: 6,225 BTU/hr
 SUCTION TEMP: 22° F
 LIQUID STUBS: 3/8IN ODS
 SUCTION STUBS: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 0.9A
 LIGHTS: 3.6A
 COND. PUMP: 1.0A
 TOTAL: 5.5A
 MCA: 15.0A

ELECTRICAL 208-230VAC, 60HZ, 1PH.

COND. PAN: 7.2A
 1HP COND. UNIT: 9.2RLA
 TOTAL: 16.4A
 MCA: 19.8A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:24	DRAWN BY: D HUNT
				DATE: 5-12-16	CHECKED BY:
				2DR 3FT DF COMBO	
DATE	REV.	DWG.	INCH		
REVISION	TOL:				
				DRAWING NUMBER P7093	