

CASE SPECIFICATIONS:


TOP AREA: 99.0 SQR FT

REFRIGERATION LOAD: 14,000 BTU/hr
 COIL: CTA 46-140
 SUCTION TEMP: 22° F
 LIQUID: 3/8IN ODS
 SUCTION: 7/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: 4.4A
 MERCH. LIGHTS: 2.4A
 STORAGE LIGHTS: 0.8A
 TOTAL: 7.6A

WALKIN COOLER INFORMATION:
 LIGHT SWITCH ADJACENT SERVICE DOOR.
 THERMOMETER ABOVE LIGHT SWITCH.
 VENT ABOVE THE SERVICE DOOR.


DISPLAY INFORMATION:
 BACK GLASS PANELS ON DIVIDING WALL ARE
 HINGED FOR REAR STOCKING.
 TEMERED GLASS SHELVES ARE HEIGHT
 ADJUSTABLE.
 ENDS OF THE DISPLAY AREA ARE ENCLOSED
 WITH METAL DIVIDERS.

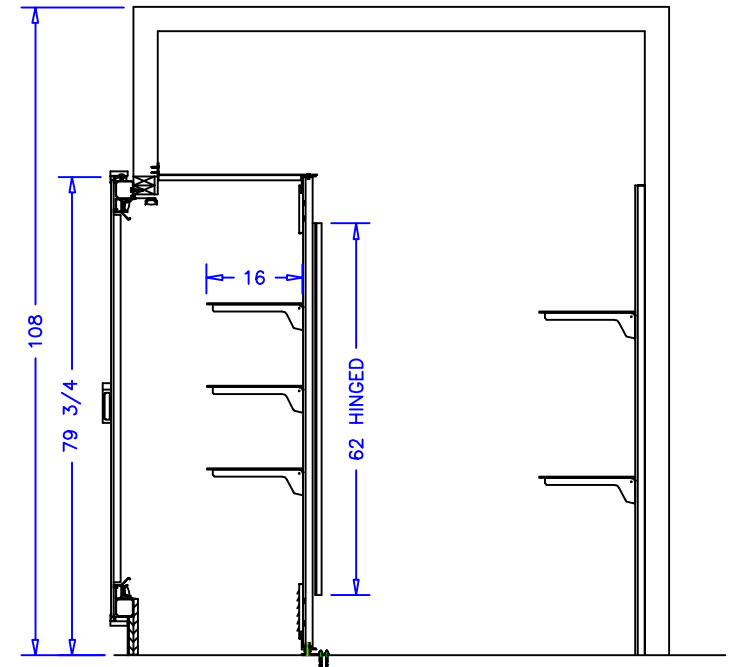

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börgeren systems	
SIGNATURE:					
				DATE: 5-25-17	CHECKED BY:
				4DR WOD	
DATE	REV.	DWG.	INCH	DRAWING NUMBER	
REVISION	TOL:				P7345