



DOOR (A) SECTION

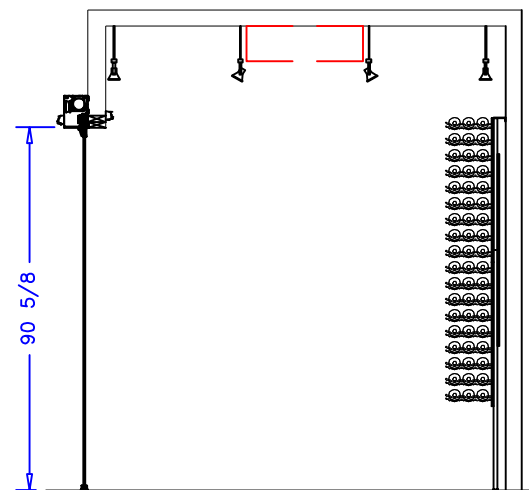


DOOR (C) SECTION

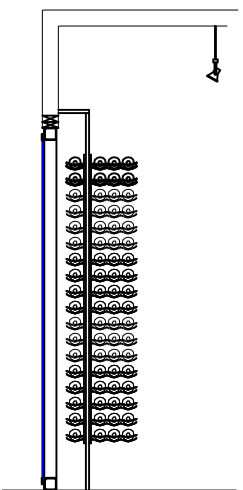

(B) SECTION

CASE SPECIFICATIONS:  
 TOP AREA: 189 SQR FT  
 REFRIGERATION:  
 LOAD: 15,900 BTU/hr  
 COIL TEMP: 35° F  
 (2) BOHN WK075 COILS  
 115VAC, 1.8A  
 AUTOMATIC SLIDER DOOR  
 115VAC, 2.5A OR  
 230VAC, 1.5A  
 DOOR LOCKS  
 115VAC, 2.4A  
 ESTIMATED LED  
 TRACK LIGHTING  
 115VAC, 10.0A




THIS EQUIPMENT IS INTENDED FOR THE STORAGE OF NON-POTENTIALLY-HAZARDOUS BOTTLED OR CANNED PRODUCTS ONLY



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 <b>börgeren systems</b>		SCALE: 1:48		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 11-29-17		OPTION B	
				12-13-17 DRH		8DR WOD WINE CSRV			
DATE		REV.		DIM.		INCH		DRAWING NUMBER	
								P7440	