

CASE SPECIFICATIONS:

REFRIGERATION


LOAD: 3,760 BTU/hr
 SUCTION TEMP: 17° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 LED LIGHTS: 2.4A
 TOTAL: 2.4A
 MCA: 15.0A

REFRIGERATION
 CONNECTION

ELECTRICAL
 CONNECTION


DRAIN
 CONNECTION

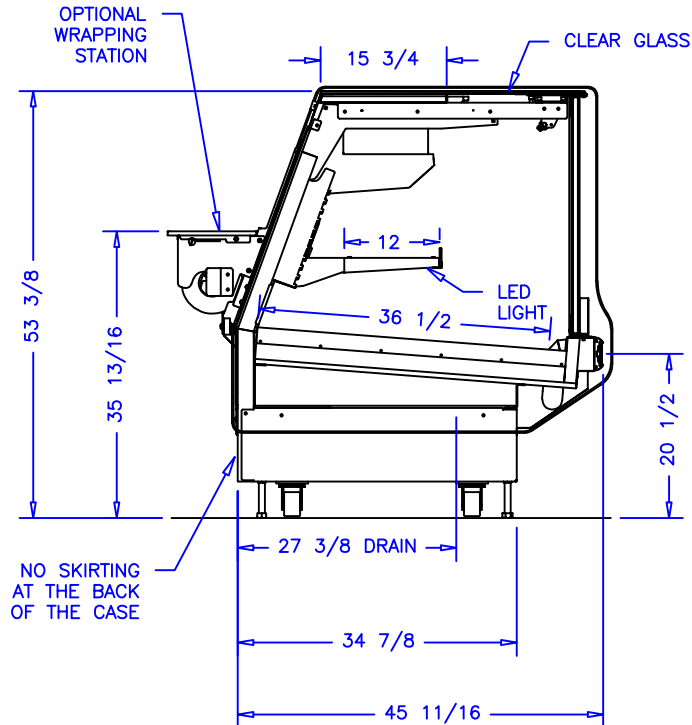

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems		DRAWN BY: D HUNT	
SIGNATURE:						CHECKED BY:	
12-3-20	DRH	SCALE: 1:24					
10-5-20	DRH	DATE: 7-23-19					
10-11-19	DRH			8FT JEWEL SERV. GRAVITY DFT			
10-1-19	DRH						
DATE	REV.	DIM:	INCH			DRAWING NUMBER	
REVISION	TOL:					P7837	