




37X1
COMMERCIAL REFRIGERATOR
LESS CONDENSING UNIT





CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 14,250 BTU/hr
SUCTION TEMP: 22° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .9A
LIGHTS: 3.6A
TOTAL: 4.5A
MCA: 15.0A

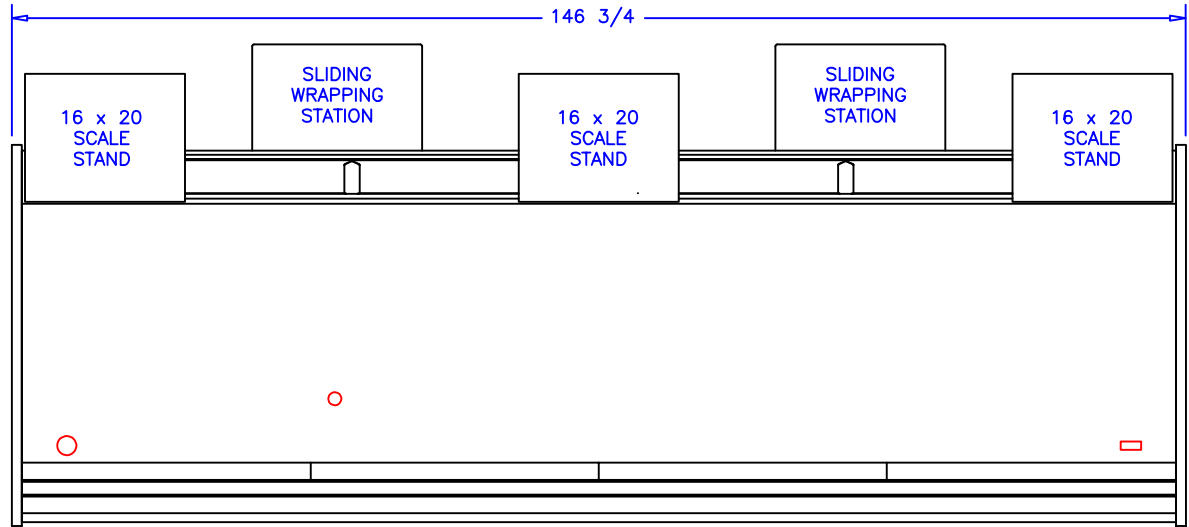

CONNECTIONS TBD DURING CASE DESIGN

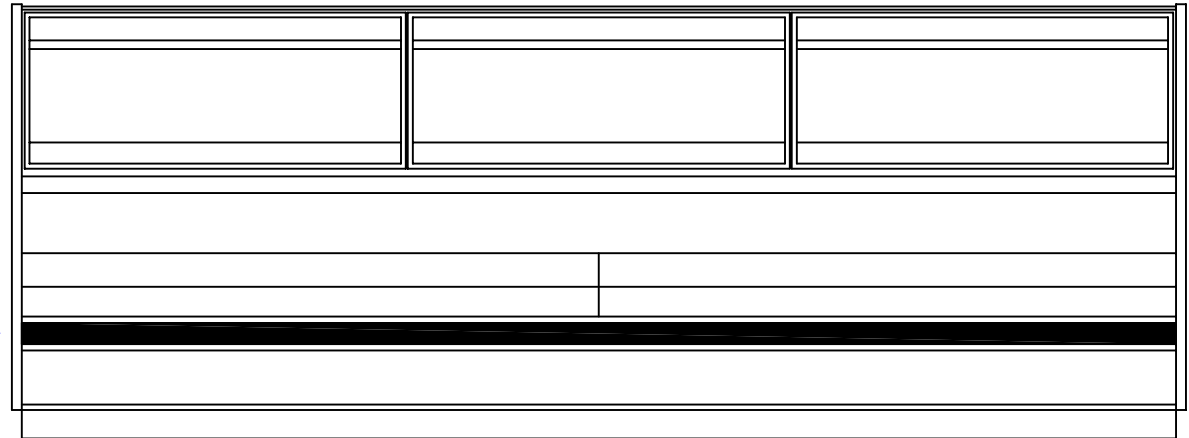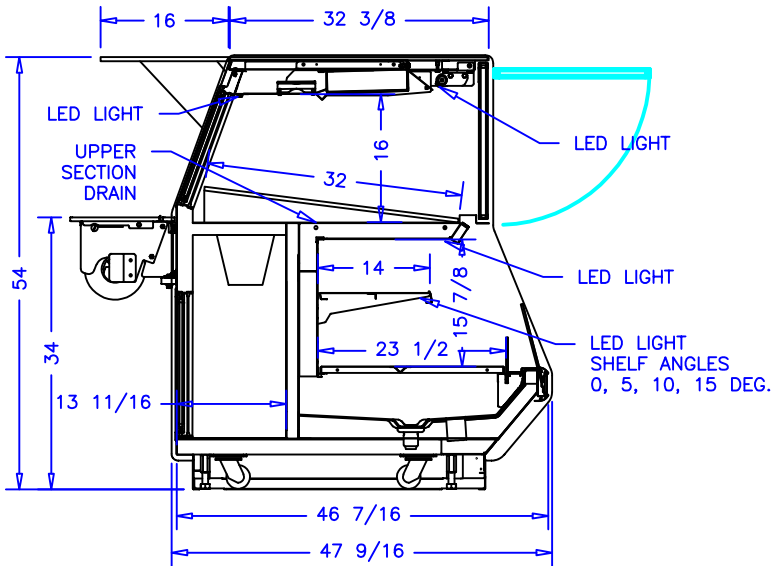

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:				SCALE: 1:32		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 3-15-22		CHECKED BY:	
						12' JEWEL OVER SELF SERV.			
DATE		REV.		DIM: INCH		DRAWING NUMBER		P8241	
REVISION		TOL:							