


REDS

WHITES

TOP OF CASE MUST BE
CONNECTED TO
STRUCTURAL WALL

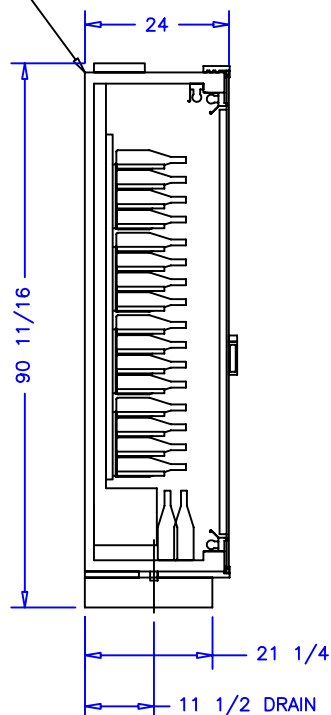

SHELVES HOLD: 128 BOTTLES PER DOOR
FLOOR HOLDS: 16 BOTTLES PER DOOR
CASE TOTAL: 1,440 BOTTLES

LEFT CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 7,240 BTU/hr
SUCTION TEMP: 30° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .26A
LIGHT BALLAST: 2.22A
TOTAL: 2.48A

OPTIONAL COMPONENTS:

ELECTRICAL 115VAC, 60HZ, 1PH.
(2) CONDENSATE PUMPS: 2.0A
(2) EVAP. PANS: 6.0A
TOTAL: 8.0A

ELECTRICAL 208VAC, 60HZ, 1PH.
REMOTE LOCATED
1 1/2 HP COND. UNIT: 10.9A
TOTAL: 10.9A

RIGHT CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 4,820 BTU/hr
SUCTION TEMP: 30° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .26A
LIGHT BALLAST: 2.22A
TOTAL: 2.48A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			 börger systems	
SIGNATURE:					
		SCALE: 1:32	DRAWN BY: D. HUNT		
		DATE: 1-25-06	CHECKED BY:		
		10 DOOR WINE			
DATE	REV.	DIM: INCH	DRAWING NUMBER		
REVISION	TOL:			P4798A	